
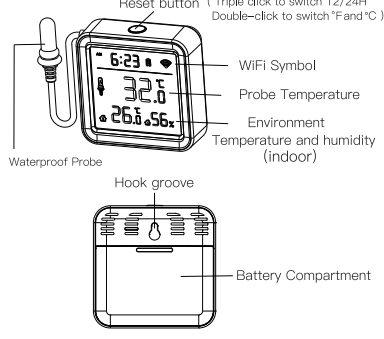
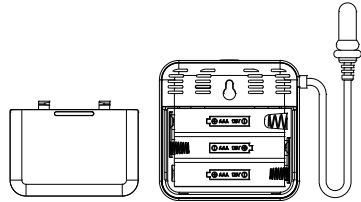

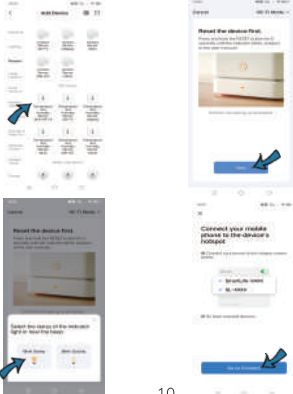

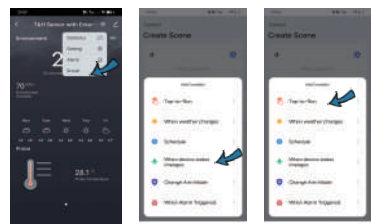




Size : 55*55MM

WiFi Temperature & Humidity Sensor with External Probe User Manual  Model: T08 -1-	Product Presentation: Reset button (Triple click to switch 12/24H Double-click to switch °F and °C)  WiFi Symbol Probe Temperature Environment Temperature and humidity (indoor) Hook groove Battery Compartment -2-	Specification: Size: 56*56*23 mm Probe: 1M length Battery: LR03-1.5V/AAA*3 (Alkaline battery) Probe Measure Range: -40°C~120°C Temperature Measure Range: -9.9°C~ 60°C Temperature Accuracy: ±1°C Humidity Measure Range: 0% RH~99% RH Humidity Accuracy: ±5% RH -3-	Checklist before using the device: a. Your smartphone has connected to a 2.4GHz Wi-Fi. b. You have input the correct Wi-Fi name and password. c. Your smartphone must be Android 6.0 + or iOS 11 +. d. If the numbers of devices connected to Wi-Fi router reach the limit, you can try to disable a device to vacate the channel or try with another Wi-Fi router. -4-	How to Use: Push the cover of battery compartment downwards , install 3 pcs Alkaline batteries in the direction of positive and negative pole, then point to 2 slots, push the cover upwards to close.  -5-
How to set up: 1. Use your smartphone to scan QR code, or search “Smart Life” app in Google Play Store or APP Store to download and install.  Smart Life QR Code Get it on Google Play Available on the App Store 2. Create an account with your mobile number and authentication code. -6-	3. Connect your mobile to your Wi-Fi router , click “+” at the upper right corner of homepage, then click “Add Device” .  -7-	4. 1) Bluetooth Mode: The app will advise you to turn on the bluetooth on your mobile, make sure the wifi symbol is flashing, then enter wifi info, it will connect automatically.  -8-	2) Wi-Fi Mode: Select “Temperature and Humidity Sensor (BLE+Wi-Fi)” from “Sensors”, then select “Blink Slowly”, make sure the wifi symbol is blinking slowly, if not ,hold reset button for about 5s till it is blinking slowly. Connect your mobile to the device’s hotspot: “SmartLife-XXXX”, then click to return to App interface, it will connect soon.  -9-	 -10-

 -11-	Application Scenes After network configuration done, close the back cover, then you can: 1. Use a clean and dry towel to clean the area where you want to mount . Peel off the adhesive tape to stick on the back of sensor, then press hard to fix it well on the wall. 2. Adsorbed on refrigerator with magnet sticker. -12-	Functions 1. Two types of temperature detection With built-in temperature sensor, you can detect the environment temperature, and with external temperature sensor probe, you can put it in some places to detect the temperature like refrigerator, fish tank, incubator, storage tank, guitar case, reptile tank, etc. 2. 12/24-Hour Switch Triple-click the reset button to switch between 12-hour and 24-hour. -13-	3. Smart Linkage You can create linkage scene with other smart devices like Smart IR Remote control. For example, when the environment temp > 32 Celsius, the Air conditioner will turn on automatically.  -14-	4. Temp & humidity Alarm You can preset the range for temperature and humidity, when the temperature or humidity goes beyond the range, it will push instant alarm message via app.  -15-
5. Temp & humidity Calibration You can calibrate the temperature and humidity in the Setting, select the calibration value, then press the reset button once, the temperature or humidity value will sync on screen and in app. 6. Temperature Unit Switch Double-click the reset button to switch the temperature unit between Fahrenheit and Celsius, it will change only on the screen, then click “Setting”, select the temperature unit, it will change accordingly. -16-	7. Temp & humidity records You can view the statistics of temperature and humidity, and export to your Email.  -17-	FAQ About 30 minutes after configuration completed, the temp and humidity is closer to actual ambient environment, so the readings are more accurate and reliable. 2. When the temperature and humidity on the screen is not sync with the data in app ? a) When deviation between temperature display on screen and in app is < ± 0.5°C. b) When deviation between humidity display on screen and in app is < ± 5% . -18-	3 . a) When device detects the environmental temperature change is ≥ 0.5°C or humidity change is ≥ 5%, the temp and humidity will be reported immediately. b) When device detects the environmental temperature change is < 0.5°C or humidity change is < 5%, the temp and humidity will be reported every 1 hour. 4. Probe Temperature : a) -10°C~50°C, accuracy 0.25°C. when the temperature change ≥ ± 1.5°C, will report immediately. b) If temperature goes out of above range, accuracy 1°C, Threshold ± 2°C. -19-	5. Please use Alkaline battery, and configure network connection immediately after the batteries are installed, and make sure the network works properly after configuration, if network is offline, the sensor will be always connecting network, which will consume battery power. 6. The probe is not made of food-grade material, please don't put it in any food to detect its temperature. 7. For the sucker we provide, please make it contact with water, then adsorb it onto the platform. -20-