

Smart Video Doorbell
User Manual




Product Features:

- **Motion Detection:** The device detects human movement within the PIR sensor's range and records video, sending push notifications to the bound mobile app.
- **HD Wide-Angle:** Features 720p HD video resolution and a 120° wide-angle lens.
- **Infrared Night Vision:** Automatically switches to night vision mode in dark environments based on ambient light levels.
- **Video Call:** When the doorbell button is pressed, the bound mobile phone receives a push notification, allowing for a video call with the visitor.

Description:

Video Doorbell:

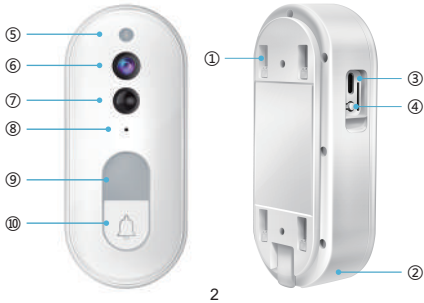

- ① Mounting Bracket
- ② Speaker
- ③ Type-c Input
- ④ Reset Button
- ⑤ Photosensitive Diode
- ⑥ Camera
- ⑦ PIR Sensor
- ⑧ Microphone
- ⑨ Status Light
- ⑩ Doorbell Button

Chime Receiver:



- ⑪ USB Power Input
- ⑫ Settings Button
- ⑬ Volume Adjustment Button
- ⑭ Music Selection Button
- ⑮ Indicator Light
- ⑯ Speaker

Video Doorbell Setup Instructions:

- ① Download the "Smart Life" App from app stores, or scan the QR code below.




Android/iOS

- ② Register and log in to the App using your mobile number or email address.
- ③ Long press the Reset button for 5 seconds until the indicator light flashes. Click the "My Home" in the App, tap the "+" icon or tap the blank area in the middle to "Add Device".



- ④ Ensure your phone's Bluetooth is enabled and the doorbell is in pairing mode. The App will automatically discover the device. Enter your Wi-Fi password to proceed with network configuration. Please follow the instructions.

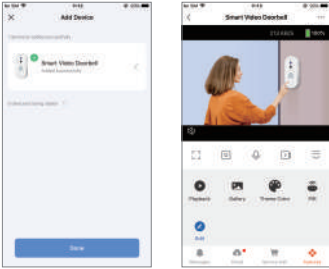

5


Chime Receiver Setup Instructions:

- ① Power on the Chime Receiver by USB 5V power adapter or any device with a 5V USB output.
- ② Long press the [Power] for 3 seconds to enter pairing mode. Then press the button on the front of the Video Doorbell to pair successfully.
- ③ Short press the [Volume] to cycle through the available chime music.
- ④ Short press the [Speaker] to cycle volume levels.

Installation

1. Installation Location

Recommended installation height: The camera lens should be 120-160 cm (approx. 4-5.2 ft) vertically from the ground. Choose the location before fixing the mounting bracket. (The doorbell can be removed from the bracket by pressing the latch).

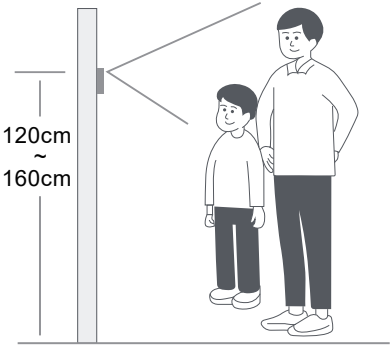

2.Installation Methods

- A .Adhesive Tape Mounting (Suitable for smooth wood or metal surfaces).
- B. Screw Mounting (Suitable for concrete or masonry walls).

Doorbell Charging

- 1. Press the latch at the bottom and push the doorbell upwards to remove it from the mounting bracket.
- 2. Open the left-side black silicone cover and connect the USB cable to charge.
- 3. After charging is complete, slide the doorbell back downwards onto the bracket until it clicks into place.

Important Notes:

- Ensure the product is installed within the coverage area of your Wi-Fi network and placed in a location with the best possible signal strength.

- This product does not support connection to 5GHz Wi-Fi networks.
- Avoid direct sunlight on the camera lens to prevent abnormal image display.
- The doorbell is rain-resistant but should not be submerged in water.
- If the device will not be used for an extended period, it is recommended to fully charge it at least once every 3 months.

Troubleshooting Guide

Symptom	Possible Cause & Solution
1. No response after long-pressing the Reset button.	The battery may be depleted due to prolonged storage. Charge the device.
2. Chime Receiver does not ring when the doorbell button is pressed.	The Chime Receiver might be installed too low. It is recommended to place it at a height above 1 meter (approx. 3.3 ft).
3. Chime Receiver volume is too low.	Check if the volume was accidentally set to the lowest level using the volume button.

Technical Specifications:

Video Doorbell

- Power Input: 5V / 2A
- Battery Capacity: 4000mAh
- Wireless Connectivity: Wi-Fi IEEE 802.11b/g/n 2.4GHz, RF 433MHz
- Resolution: 1280x720
- Lens Angle: 120°
- Audio: Two-Way Audio
- Storage: Cloud Storage / Local Storage (Supports SD 2.0 only)
- Operating Temperature: -10°C~+55°C (+14°F~+131°F)
- Operating Humidity: 10% - 90% RH, non-condensing

Chime Receiver

- Power Input: USB 2.0-A / 5V
- Wireless Connectivity: RF 433MHz
- Built-in Melodies: 36
- Volume Settings: 8 levels
- Operating Temperature: -10°C~+55°C (+14°F~+131°F)
- Operating Humidity: 10% - 90% RH, non-condensing