
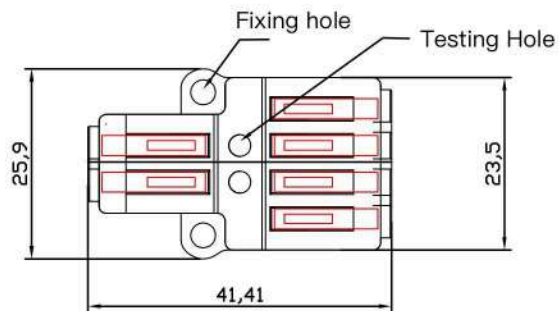
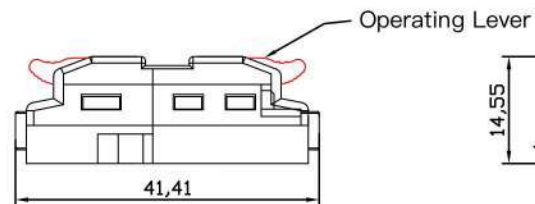
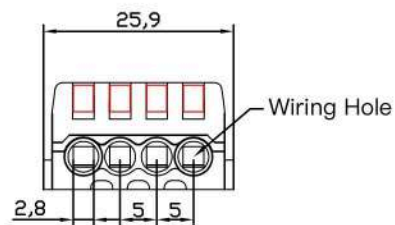


SPECIFICATION

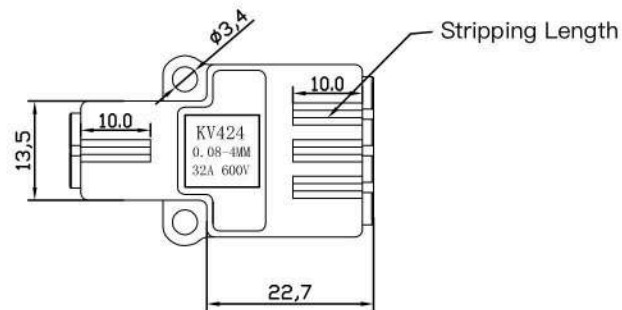


SPECIFICATIONS

- Applicable wires: 28-12AWG
- Temperature Range: -25~95°C
- Voltage rating: 250V/600V
- Current rating: 32A
- Contact resistance: $\leq 0.015 \Omega$
- Insulation resistance: $\geq 1000M \Omega$
- Material:
 - Housing: PA66/PC UL94V-2(0)
 - Contact: Brass Tin plated
 - Spring: 301 stainless steel
- Meet Reach 15 Tests
- Tolerance of size less than 5: $\pm 0.05mm$

NO.				Unit: mm		Product	Quick Wire Connector KV424			Date	2018/11/17	
1				0.0		Model	KV424			Scale	1:1	
2				0.00		CHKD	DRAW	APPD		Weight	11.4 g	
3				0.000						DWG No.		

SPECIFICATION






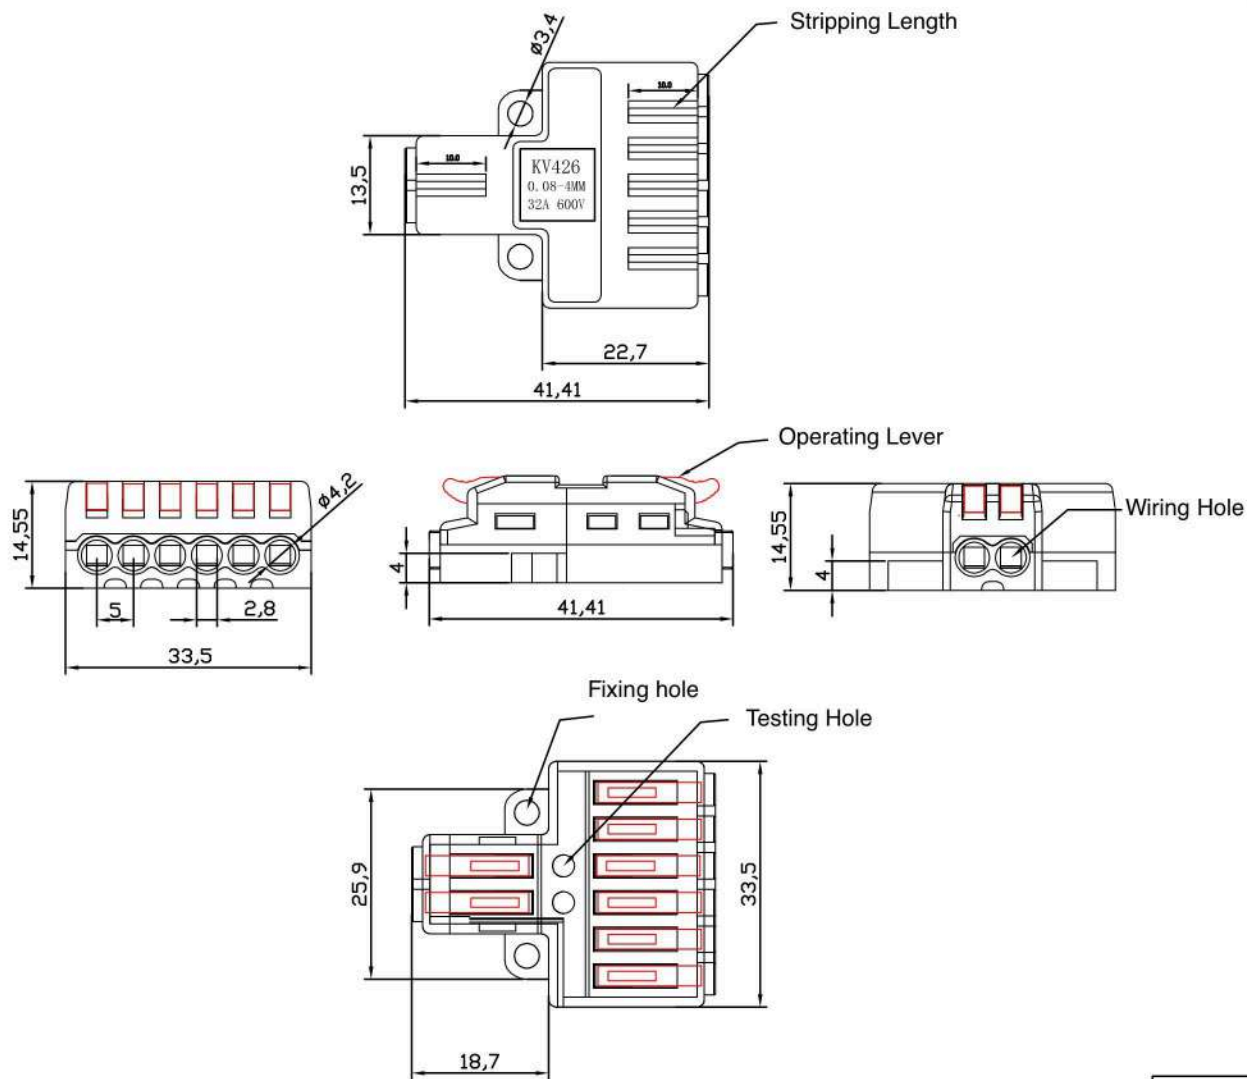


SPECIFICATIONS

- Applicable wires: 28-12AWG
- Temperature Range: -25~95°C
- Voltage rating: 250V/600V
- Current rating: 32A
- Contact resistance: $\leq 0.015 \Omega$
- Insulation resistance: $\geq 1000M \Omega$
- Material:
 - Housing: PA66/PC UL94V-2(0)
 - Contact: Brass Tin plated
 - Spring: 301 stainless steel
- Meet Reach 15 Tests
- Tolerance of size less than 5: $\pm 0.05mm$

NO.				Unit: mm		Product	Quick Wire Connector KV426			Date	2018/11/17	
1				0.0		Model	KV426			Scale	1:1	
2				0.00		CHKD	DRAW	APPD		Weight	14.3 g	
3				0.000						DWG No.		


Specification

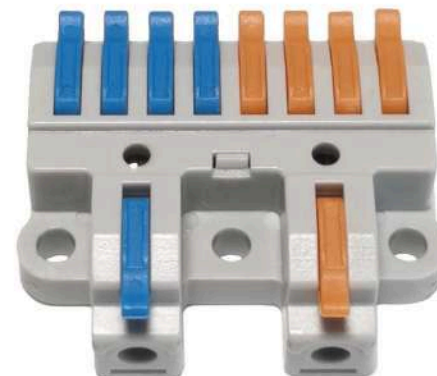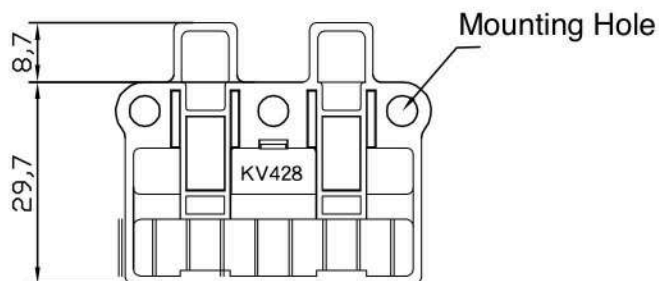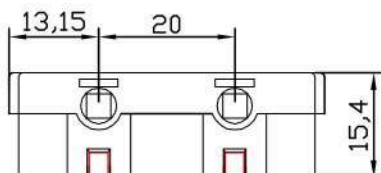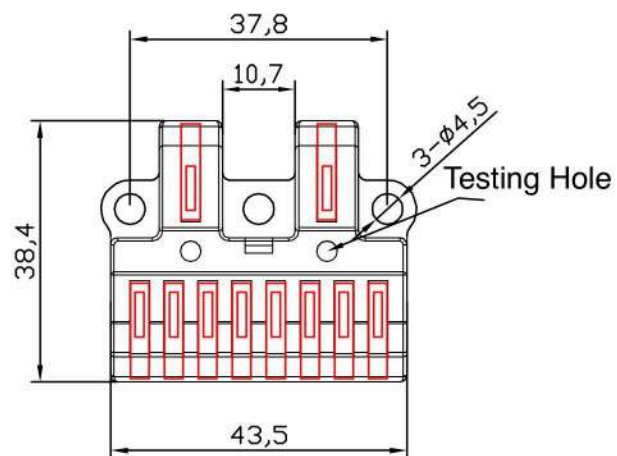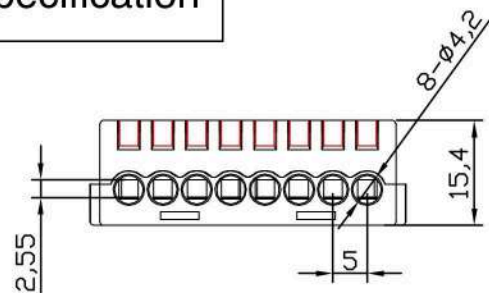


SPECIFICATIONS

- Applicable wires: 28-12AWG
- Temperature Range: -25~95°C
- Voltage rating: 250V/600V
- Current rating: 32A
- Contact resistance: $\leq 0.015 \Omega$
- Insulation resistance: $\geq 1000M \Omega$
- Material:
 - Housing: PA66/PC UL94V-2(0)
 - Contact: Brass Tin plated
 - Spring: 301 stainless steel
- Meet Reach 15 Tests
- Tolerance of size less than 5: $\pm 0.05mm$

NO.				Unit: mm	Model	KV428			Date	2019/11/8
1				0.0	Material				Scale	1:1
2				0.00	DRAW	CHKD	APPD		Weight	20.1g
3				0.000					DWG No.	







Specification

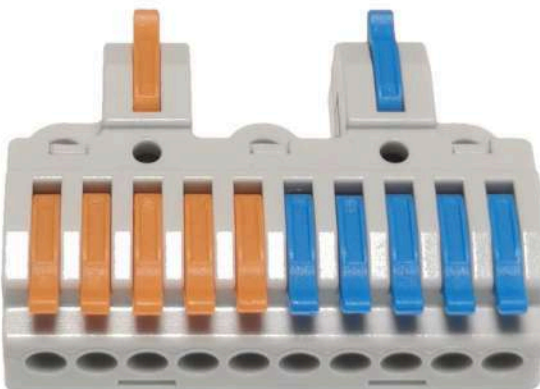

SPECIFICATIONS

- Applicable wires: 2.5-4mm²
- Operating temperature: -40~105 °C
- Voltage rating: 450V
- Current rating: 32A
- Stripping length: 10-12mm
- Material:
 - Housing: PA66/PC UL94V-2(0)
 - Contact: Brass Tin/plated
 - Spring clasp: 301 Stainless steel
- Meet Reach 15 items test
- Tolerances (< 5mm): ± 0.05mm

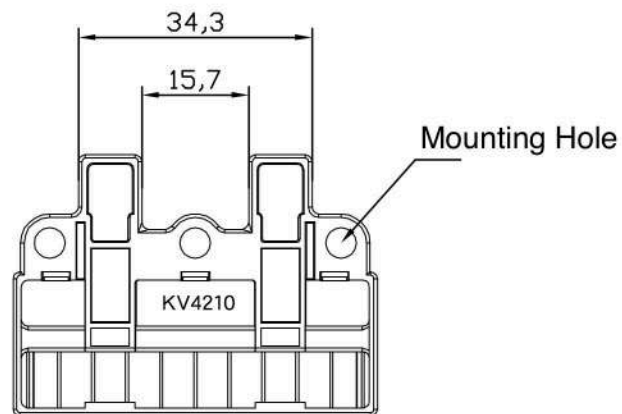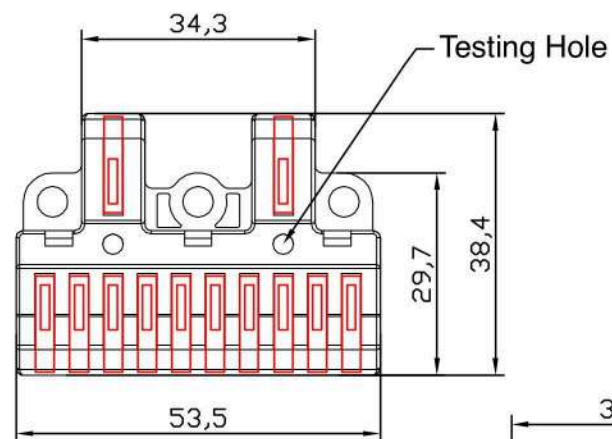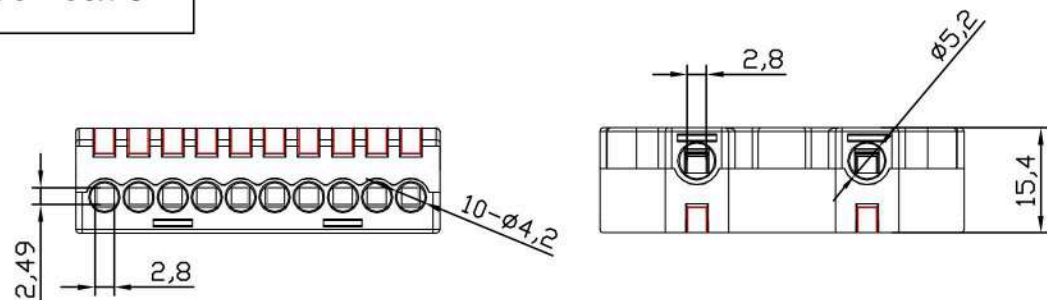

NO.	Unit: mm	Model	KV4210			Date	2019/11/8	
1	0.0	Material				Scale	1:1	
2	0.00	DRAW	CHKD	APPD		Weight	22.4g	
3	0.000					DWG No.		