


PRODUCT PARAMETERS

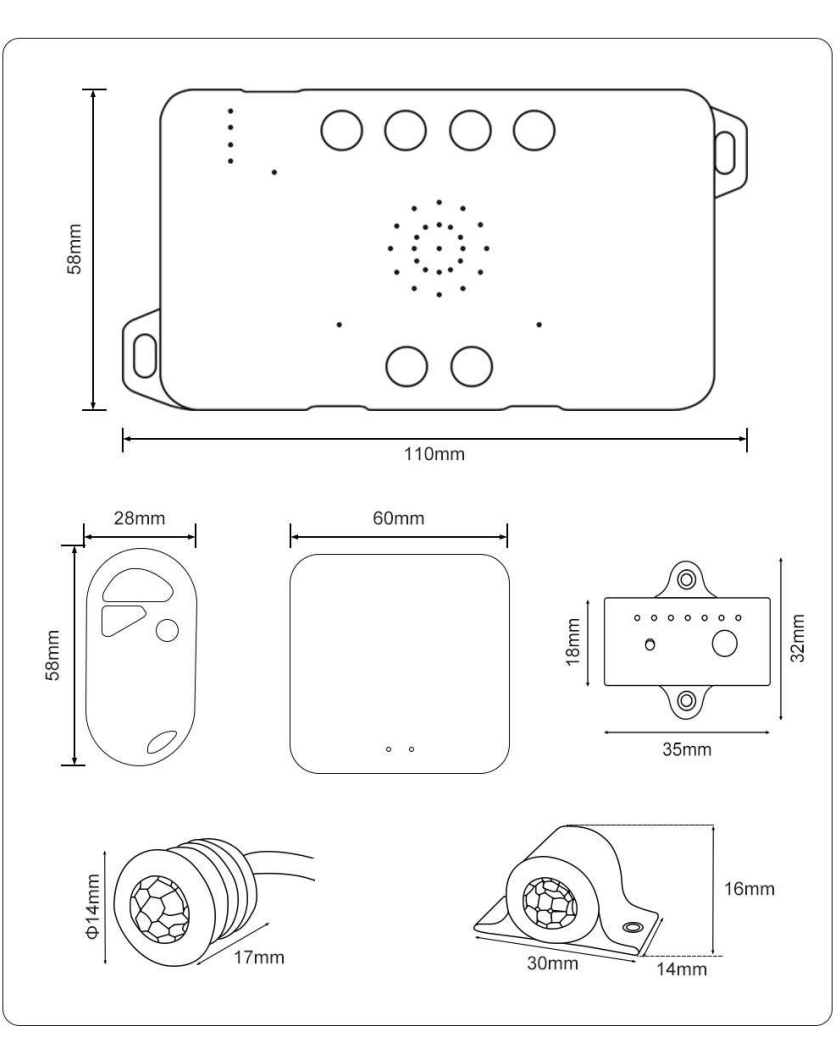

PRODUCT NAME Stair Lighting Controller With Remote	MODEL NUMBER 35914(WZ)
VOLTAGE DC12V-24V	MAX CURRENT 25A
MAX LOAD DC12V/300W,DC24V/600W	MATERIALS ABS
APP Tuya,Smart Life	APPLICATION Control Stair LED Strips
FUNCTION Adjust/Delay Time/Brightness/Speed/Color	

PRODUCT DETAILS

01

INTERFACE DESIGN

Power cord interface





02


BUTTON DESIGN

Function buttons


03

REMOTE KEY


Remote control operation

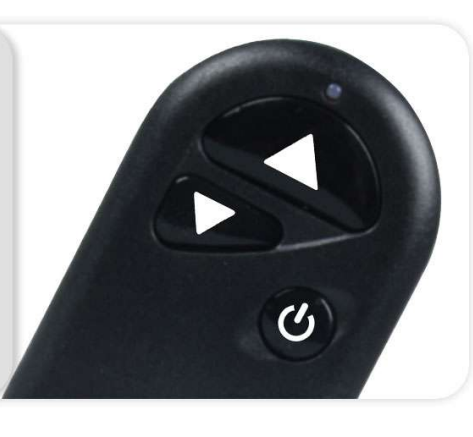

INSTALLATION DIAGRAM

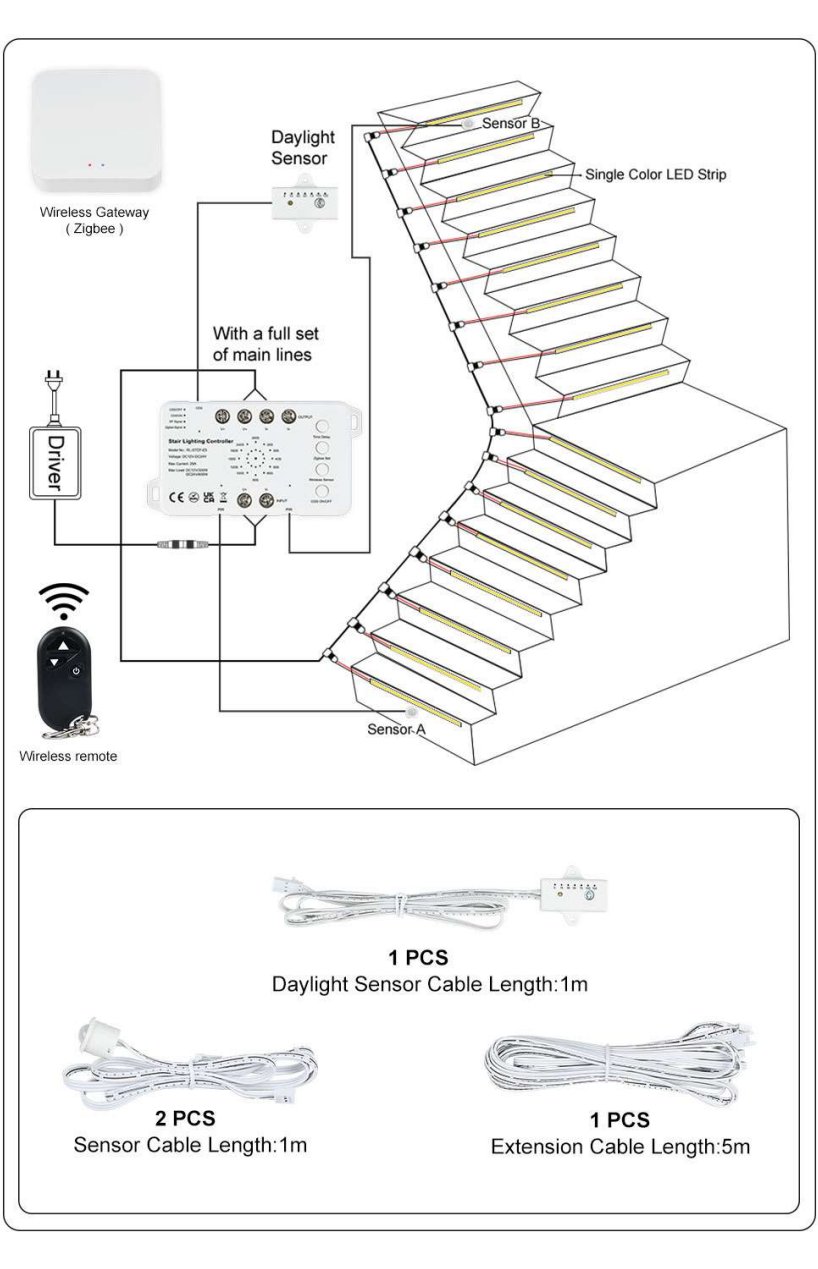

FUNCTION OF BUTTON

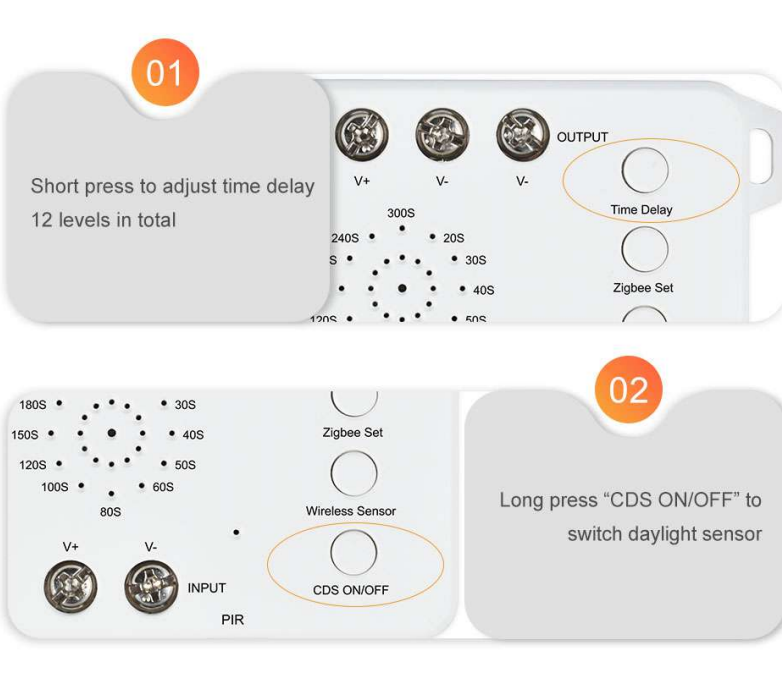


MATCH REMOTE CONTROL



To Match: Long press "Wireless Sensor" and "ON/OFF" button at the same time. The RF Signal will blinks three times.

To Clear: Long press "Wireless Sensor" and "ON/OFF" button at the same time. The RF Signal will blinks seven times.

FUNCTION OF REMOTE

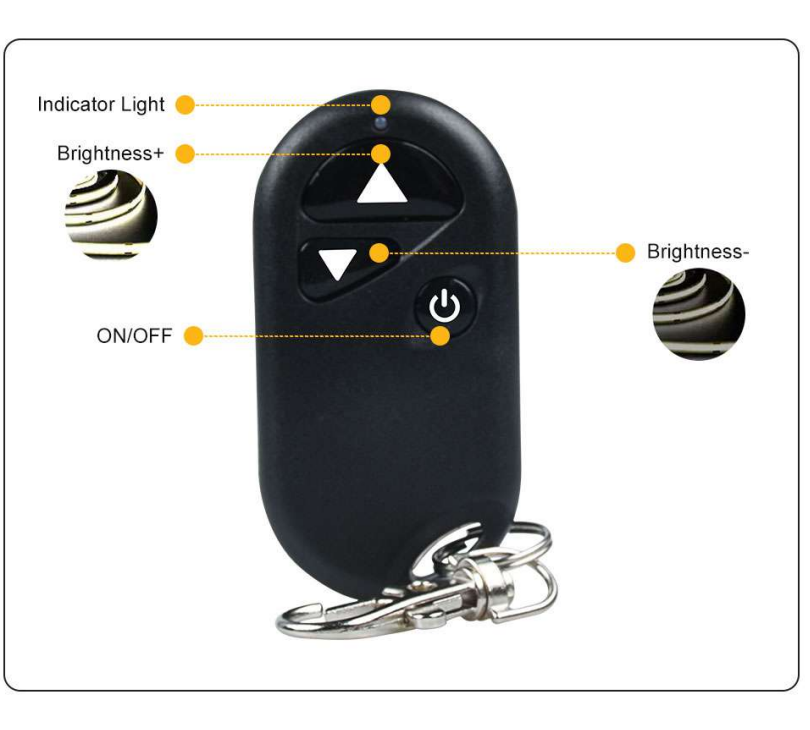

APP CONTROL INSTRUCTION

1.Download [Tuya Smart] APP

2.Click "Register" button to create account

3.Log in directly if you already had account.

(Search for [Tuya Smart] in Apple / Google store or scan the QR code to download the app.)

CONNECT APP

1. Connecting the Wireless Gateway


Login to Tuya APP, Click the "+" button on the upper right corner to add a new device, select "Wireless Gateway (Zigbee)".

Select 2.4GHz WIFI network and enter password.



Power on the Wireless Gateway, long press the button of the device, waiting the blue light always on, and the red light blinks.

According to your gateway to choose blink slowly or blink quickly, then waiting to connect the device.

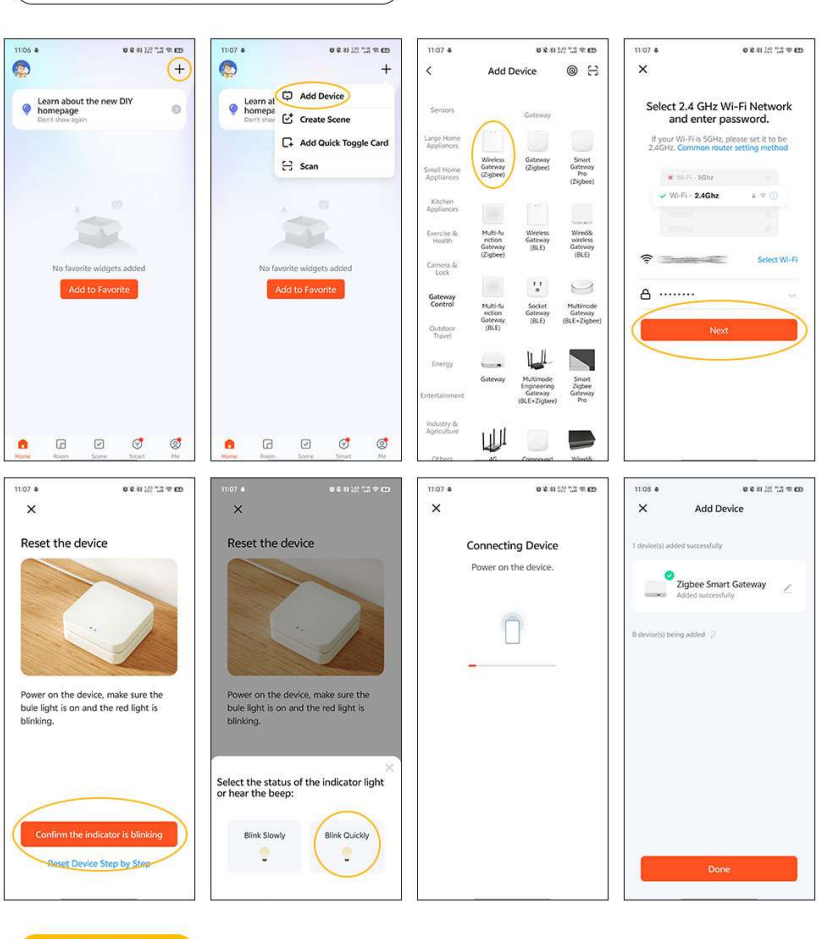


2. Zigbee Set



Enter the Zigbee Smart Gateway interface, click "Add subdevice".

Long press the "Zigbee Set" button on the controller until the led strip flashes. Click "LED Already blinks"


It will automatically search, click "NEXT". Then it is added successfully.

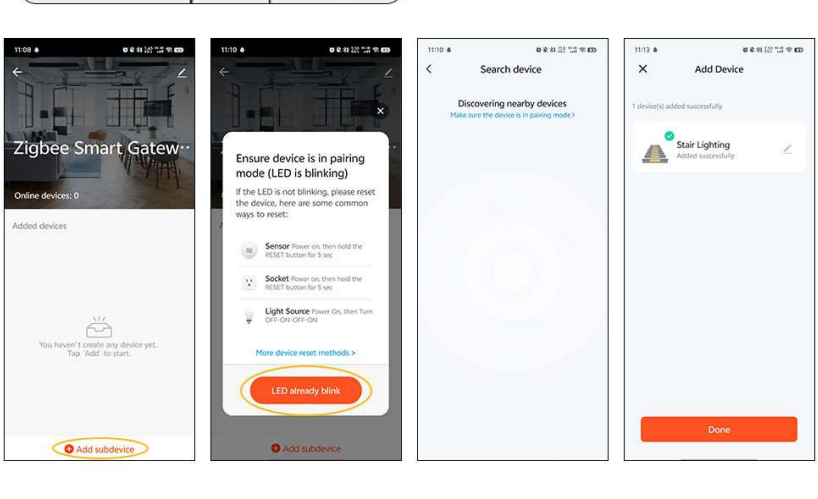

APP FUNCTION


Adjust Brightness/ON/OFF

1%-100% brightness adjustable/ON/OFF

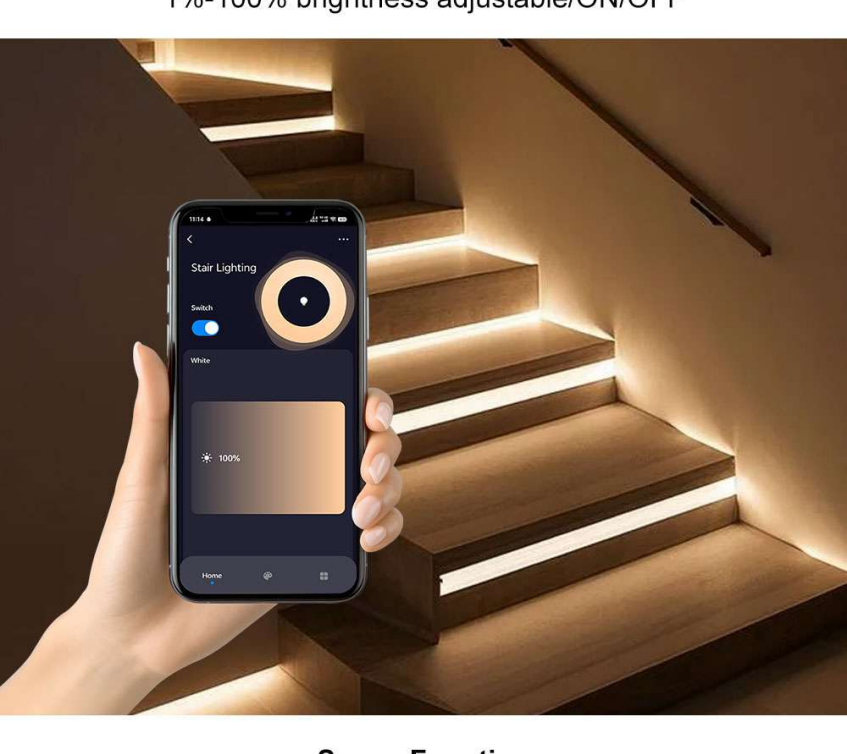


Scene Function

DIY/Good Night/Reading/Working/Leisure

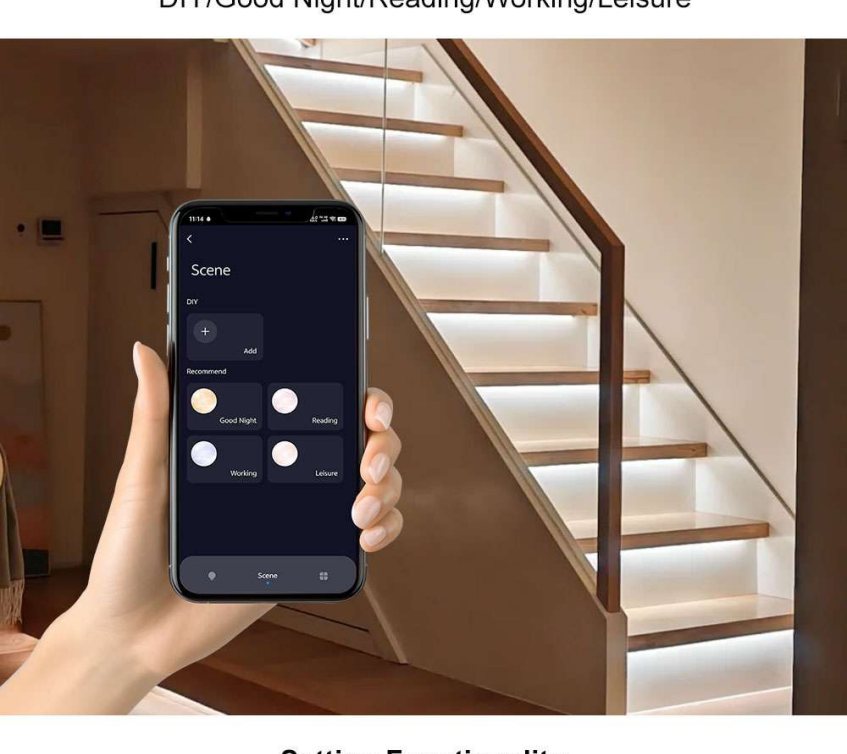


Setting Functionality

Schedule/Do Not Disturb/Default Light/Gradient

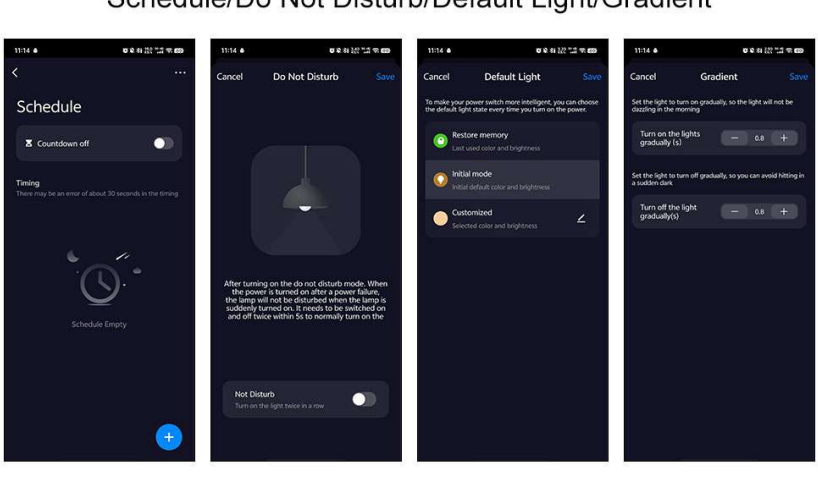

HOW TO USE

1 . Indicator light description

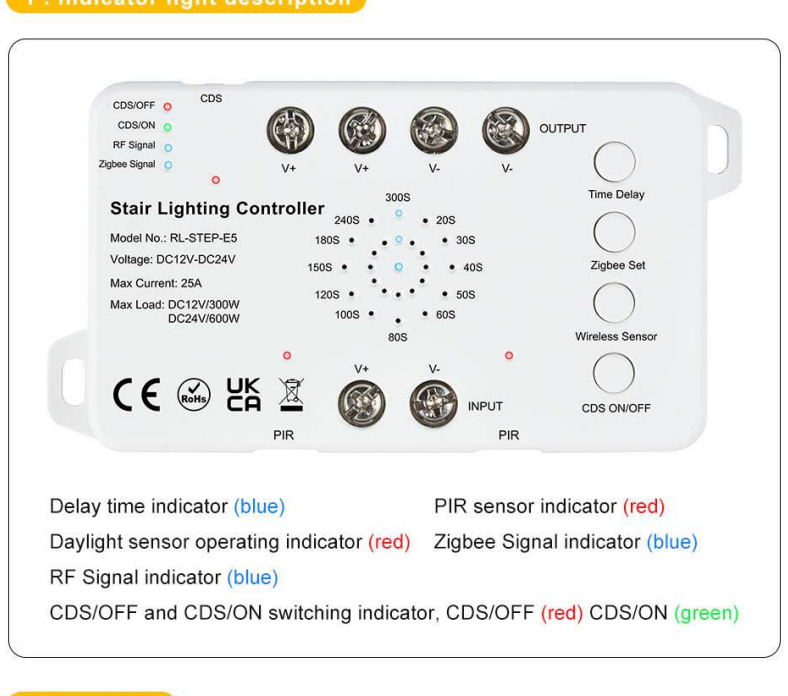


Delay time indicator (blue) PIR sensor indicator (red)

Daylight sensor operating indicator (red) Zigbee Signal indicator (blue)

RF Signal indicator (blue)

CDS/OFF and CDS/ON switching indicator, CDS/OFF (red) CDS/ON (green)

2.Time delay

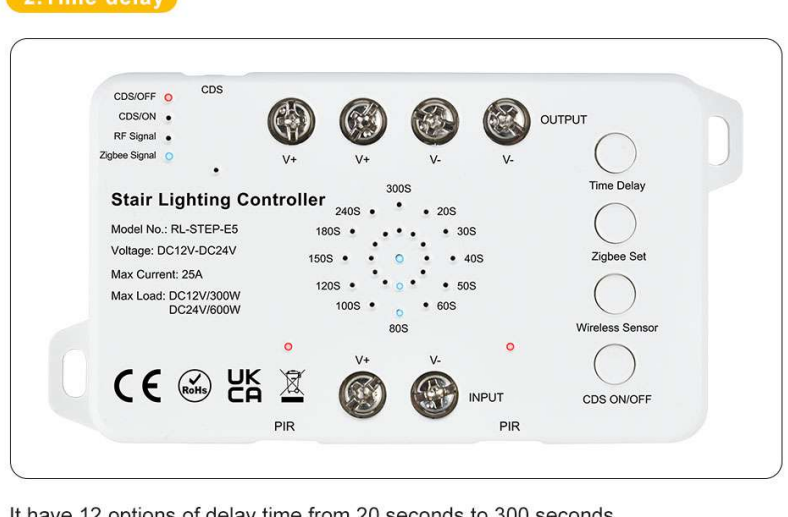


It have 12 options of delay time from 20 seconds to 300 seconds

3 . CDS ON/OFF

Long press "CDS ON/OFF" to switch between CDS ON and CDS OFF

CDS/OFF: PIR Sensor works day and night

CDS/ON: PIR Sensor works at night

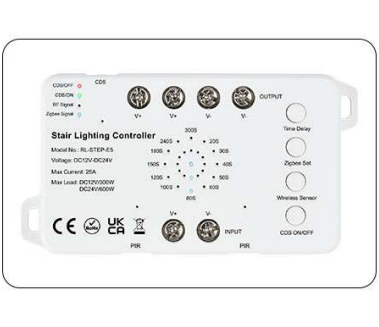


4 . Daylight Sensor



The Daylight sensor does not need to be placed visibly near the steps, but it should be able to detect light and dusk.

1x Press	5 Lux - The sensors will work when it is quite dark
2x Press	15 Lux
3x Press	30 Lux
4x Press	50 Lux
5x Press	75 Lux
6x Press	100 Lux
7x Press	150 Lux - The sensors will work in dim ambient light

5.Sensor installation method

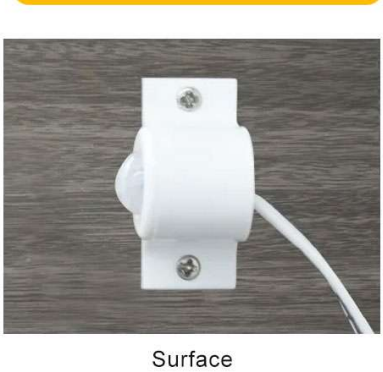

Surface



Recessed

APPLICATION SCENARIO



PRODUCT LIST

