


TH WiFi Smart Switch

Model: TYTHE-D2



Parameters:

Input voltage: AC 85V~250V

Max.Current: 16A

Wi-Fi Standard: Wi-Fi 2.4Ghz b/g/n+Bluetooth

Display resolution: 0.1°C or 1%RH

Working temperature: -20°C~80°C

Size: 96*53*31mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.

- You have the correct WiFi PWD.
- You smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide


- 1 You can download the App by searching "Tuya Smart" in mobile app stores or scanning the following QR code




- 2 Register an Tuya Smart account.
- 3 If you have Tuya Smart account, just login.

Add devices

- 1 Reset the device first:
if the network indicator(red light) blinking fast (0.5S/time) , skip the reset step.
 - 1 Power on
 - 2 hold down the Reset button for 6 seconds.until network indicator blinking fast(0.5s/time).



- 2 Clicking + in the top right corner on tuya smart app.then,wait a few seconds, After the devices are found,Click "Add"



- 3 Select a 2.4GHz Wi-Fi network and enter your password.



- 4 Name your device.




- 5 When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.
- 6 Click the on/off buttons on the APP can control device,Manual control switch also can be display real-time on the APP.

APP Function



Tip here to enter the full function operation interface.

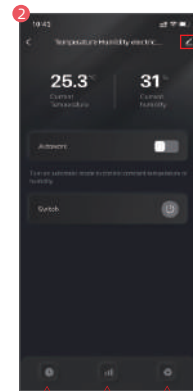

Rename
/Offline Notification
/Third-party Control
/Share Device
/Create Group
/Remove Device

/Timer
/Cutdown
Statistics
/Humidity
/Energy
Set
/Temperature range
/Humidity range
/Delay to turn on
/turn on alert
/Temperature unit setting
/Temperature calibration
/Humidity calibration

Remote control matches the code

Matching:

- 1 hold the manual switch for 3 seconds, the RF pairing indicator(blue light) is on.
- 2 then long press the remote control buttons.
- 3 loosen the remote control buttons, matching success



Clear code:

Long press the manual switch for 15 seconds (RF pairing indicator is always on), loosen the manual switch until the RF pairing indicator(blue light) is off,and the RF pairing indicator flashes rapidly for 5 times.

* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING

Enter the homepage of App,click the icon in the lower right corner of the interface to enter.

