

80.00 mm

150.00 mm

User Manual

The products support POE and video intercom for both one-to-one and group calling. Outdoor Station supports multi-mode verification including facial recognition, card swiping and password. Indoor Station supports unlock at home and camera monitoring. With its fast recognition, high security, and large-capacity database, it is ideal for use in communities, apartment, Villa, etc.

Features

Outdoor Station

- POE connection
- 2MP cameras, wide-angle lens with IR LED illumination
- 30,000-face database, >99.99% accuracy, <1sec recognition
- 50,000 local records; offline operation
- Multi-Language systems

Indoor Station


- Support POE connection and Tuya WiFi
- Support camera monitoring
- Remotely unlock at home
- Multi-Language systems
- Multiple intercom modes are available for selection

Specification

Screen	IPS HD Touch Screen
Camera	2 MP, wide-angle lens with IR LED illumination
Operating Temperature	-20°C~ 60°C (Outdoor Station)
System Connection	999 Indoor Monitors + 4 Door Stations + 4 Cameras
Communication	TCP/IP (RJ45) between outdoor and indoor stations, Indoor station support WiFi at the same time.
Face Capacity	30,000
Card Capacity	500
Card Type	13.56MHz Mifare Card
Dialing Mode	Villa Mode (One-touch Call) / Multi-user Dialing Mode / Direct Call Mode (Max 32 Users)
Unlocking Way	Face Recognition, Mifare Card, Password
Language	English, Chinese, Russian, French, Spanish, Portuguese
Installation	Wall-mounted
Material	Tempered Glass Panel + Aluminum Alloy


Wiring Connection

Outdoor Station:

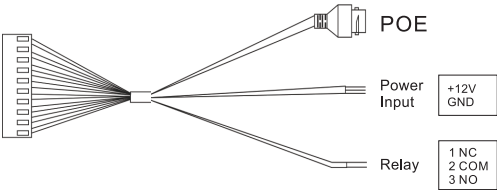

Indoor Station:

POE Connection



Instruction Manual Download:



105G铜版纸两面印刷