



TuyaSmart

Thank you for using smart camera


2.Install APP

Download APP: scan the QR code below to download and install. Register and login: open the "TuyaSmart" APP to register and login according to the prompts.



3.1 Add The Device—Scan QR Code Mode


- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "TuyaSmart" APP, click "+" icon in the upper right corner or click "Add Device" on the home page(Figure 01); choose "Security & Video Surveillance", click " Floodlight Camera " (Figure 02) to add camera; and then click " Next "after reset the device (Figure 03);

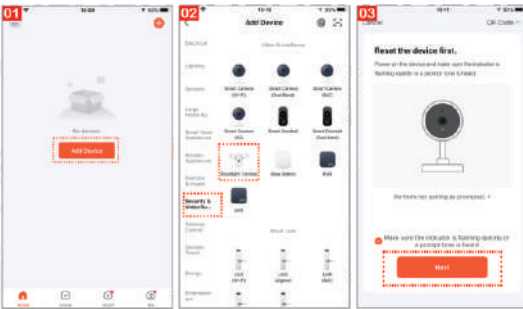


- If the mobile phone is not connected to Wi-Fi, please click "Go to Connect"(Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05).
- If the mobile phone is connected to Wi-Fi,please enter the Wi-Fi password and click "Next"(Figure 06);



- The mobile phone displays a QR code and you need to use the camera lens to scan to the QR code(Tips:Place the app QR code in front of the camera at a distance of 15 to 20 cm.Adjust the angle and distance until you hear a prompt), then click'I heard a Prompt'(Figure 07);
- Waiting to Adding device (Figure 08);
- You can name the camera when device is added successfully (Figure 09), and click "Done";

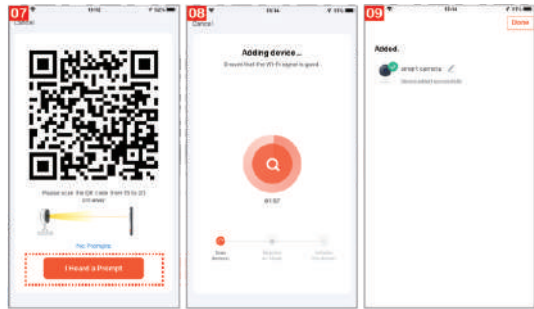


- Then jump to video preview interface (Figure 10)
- After closing the device preview interface,then return to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

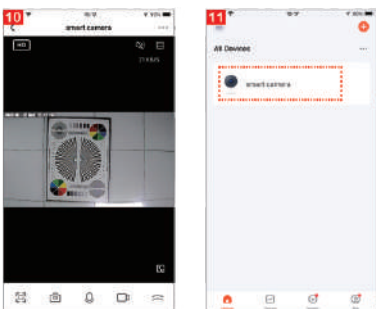


3.2 Add The Device—AP Mode

- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "TuyaSmart" APP, click "+" icon in the upper right corner or click "Add Device" on the home page(Figure 12); choose "Security & Video Surveillance", click " Floodlight Camera " (Figure 13); click"QR Code",then select "Wi-Fi Mode" (Figure 14);

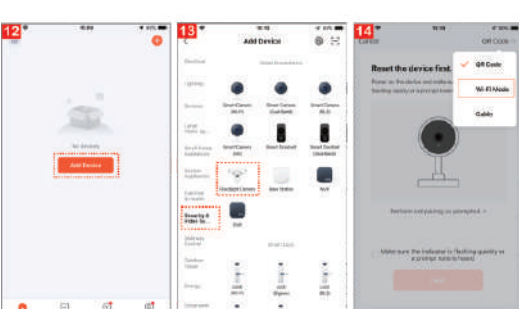


- Note :** The AP hotspot password is: "12345678". If the device's AP hotspot is not found, please press the "Reset key" to start the AP hotspot
- Then click "Next" (Figure 15);(Figure 16);
 - Switch to "AP Mode",click "Next" (Figure 17);
 - If the phone is not connected to the device's AP hotspot , there will be a prompt to connect,you need to activate the device's AP hotspot by lightly pressing the "Reset key"of the device,then click "Go to Connect" (Figure 18);

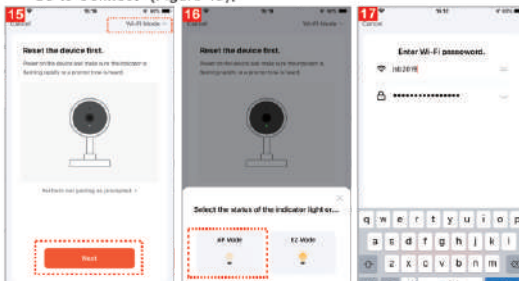

- Enter into WALN list connection interface, choose and connect to "Smart LiFi-xxx"or "SL-xxx" network (Figure 19);
- Return to APP after successful connection, at which time the APP display device is under connecting,the connection will take about 2 minutes.Wait a moment (Figure 20);
- You can rename the camera when device is added successfully and click "Done" (Figure 21);



- Then jump to preview Interface (Figure 22)
- After closing the device preview interface,then return to the APP home page. At this time, the connected device will appear on the APP home page (Figure 23). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

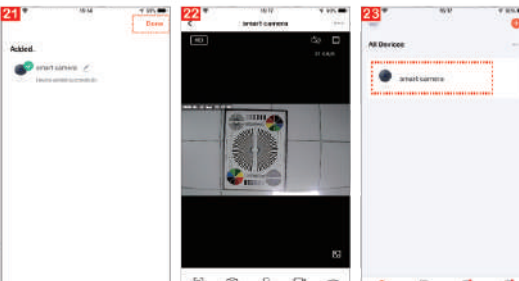

4. Q&A

- 1.Can't add the device?
A. Please make sure the camera has been reset. Press the Reset button until hear the prompt tone
B. Please turn on the GPS service before adding the device on the mobile phone . After installation is complete, you will be asked to turn on GPS service when you use the app at the first time, If you choose not to turn on the GPS service, please uninstall and reinstall the app again
C. Please confirm the camera wasn't binding by the other account.

- 2.The camera disconnect?
Please check the power and the Internet then restart the camera. If this way doesn't work, please remove the camera and add it again in the App.

- 3.The TF card can't be identified?
Please check the TF card if it meets the quality requirements, when the Wi-Fi signal is not good, it also can't be identified.
Please be sure the power is off when remove/insert micro SD card.

5. Matters Need Attention

Try to keep away from the metal space;
Avoid the furniture , microwave oven blocked;
Avoid the space where the audio, video and data lines are wound, and keep the space away from them as large as possible;
Ensure that as close as possible to the coverage or wireless Wi-Fi signals. Switching network environment;
In the new network environment, please press the reset hole about 5 seconds, then connect to the network.

Notice:
While using this product,please modify the user password,to avoid the delinquents misappropriation;
Do not install the equipment in damp,dusyt,children easy access to the venue;
Please allow within the scope of use and storage of temperature and humidity ,do not disassemble it at will.

22.5*143CM157克双面印刷 1万张张， 风琴三页二折+对折