
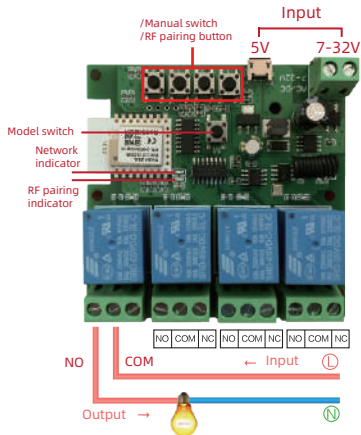


Zigbee Three Mode Switch

Model: ZG- 003
Model: ZG- 003-RF



Parameters:

Input voltage: DC/AC 7V~32V
Max.Current:2200W/10A/gang
Wireless Standard:Zigbee
Working temperature: -20°C~70°C
Size: 69*41*20mm

Checklist before using the device

- You need to have a Zigbee gateway.
- Try to be close to the Zigbee gateway when pairing.

Add device flow to mobile APP

Here is an example of adding a device to tuyu Zigbee gateway

- 1 After installation, power on the device and confirm that the device's network indicator is flashing Status, click the Zigbee gateway card. (If the device network indicator is not flashing, you can press and hold any manual Switch for 8 seconds to reset the device)



- 2 Click "Add subdevice" .




- 3 Wait for about 1 minute until the device is found,then click "Done" .



- 4 Add successfully, return to the main interface of tuyu, you can see the newly added device.

- 5 When the device's network indicator light is on, remote control can be performed.

APP Function



Tip here to enter the full function operation interface.



Rename
/Third-party Control
/Offline Notification
/Share Device
/Create Group

Long press the switch to change the name and icon

/Schedule
/Countdown
/Sunrise/Circulate
/Random

/Restart status
/Light Mode

Remote control matches the code

Matching:

- 1 hold the manual switch for 3 seconds until RF pairing indicator(blue light)is on.
- 2 then long press the remote control buttons .
- 3 loosen the remote control buttons,matching success.



Clear code:

Long press the manual switch for 15 seconds (RF pairing indicator is always on), loosen the manual switch until RF pairing indicator is off.

* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING Solutions for the failure of product matching and offline:

Enter the homepage of App,click the icon in the lower right corner of the interface to enter.

