





MOTION SENSOR INSTRUCTION




Installment

- 1.Use the Screw to install the base of the PIR base to the wall or other vertical place.
- 2.Install the main body on the base.

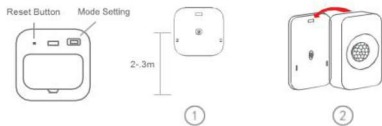

Detect angle and distance:

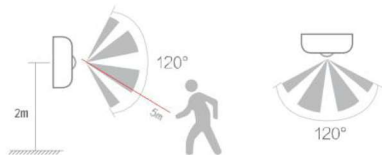

Vertical: Detect 120°
Detect Distance: 5 meters

Horizontal: Detect 120°

Specifications

Battery: AAA1.5V x 3
Standby current: 20uA
Standby time: 1 years
Standard Mode: 5 months (15 times/day)
trigger one time every two minutes
Eco Mode: 5 months (15 times/day)
trigger one time every four minutes
Sensitivity distance: 5m
Sensitive angle: 120°
Wireless Type:2.4GHz
Protocol:IEEE 802.11b/g/n
Wireless Range: 45m
Operating Temperature:-30~70℃ (-80°F~158°F)
Operating Humidity: 20% ~ 85%
Storage Temperature:-40℃ ~ 80℃ (-104°F~176°F)
Storage Humidity:0% ~ 90%
Size:65mm x 65mm x 30mm




Download App

- 1.Android phone: download“Smart Life”from Google Play.
- 2.Iphone :download“Smart Life”from App Store.




Add Device

- 1.Run “Smart Life”from your smart phone desktop.
- 2.Register and login

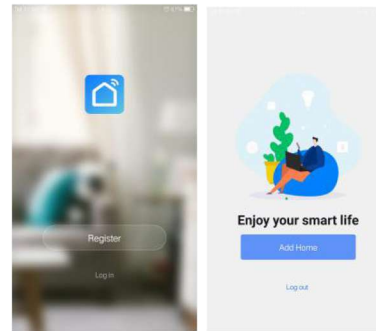

Motion Sensor :

Select Device Type,select“Wi-Fi Connector” in the list to add the device.

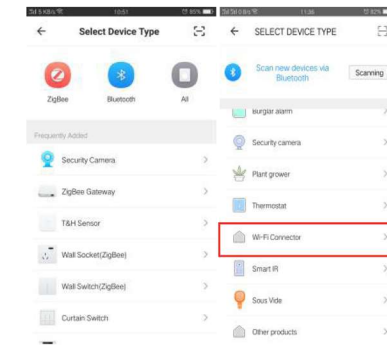


Network Configuration

There are two methods to bind door sensor to App. One is Smart Wifi Mode and the other is AP Mode.


1. Smart Wifi Mode:

Press and hold:“WiFi Coding / RESET Button” for 6 seconds, the indicator will blink rapidly. The device is in Smart Wi-Fi Mode.

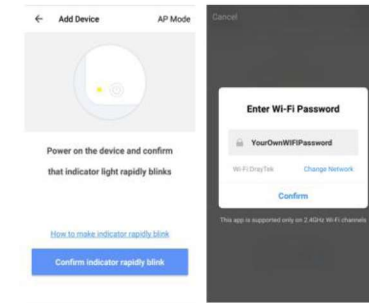


2.Ap Mode:

Select AP Mode at upper right corner on the App. Press and hold:“WiFi Coding / RESET Button” for 6 seconds again, the indicator will blink slowly, and the device is in AP mode. After entering your WiFi password and connect your phone to door sensor's WiFi hotspot then press “Connect Now”.

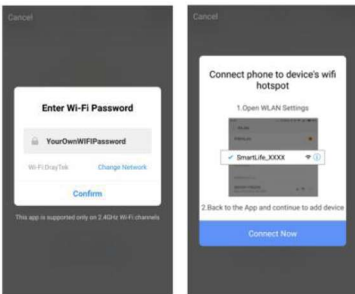

Connecting :

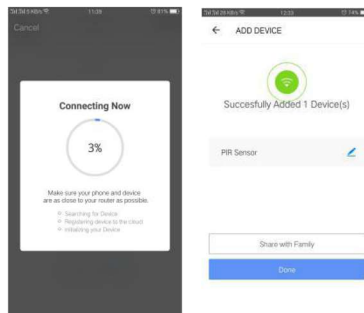


Finished.

Motion Sensor:




Customize Scenes

associate two devices to work to create your own scene

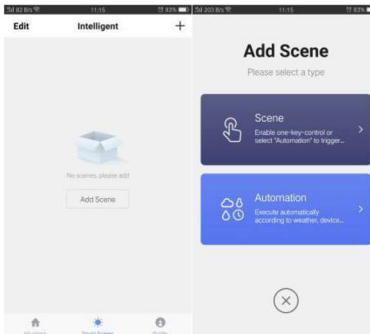

Share & Push Notification

Share: Share your devices to others directly .

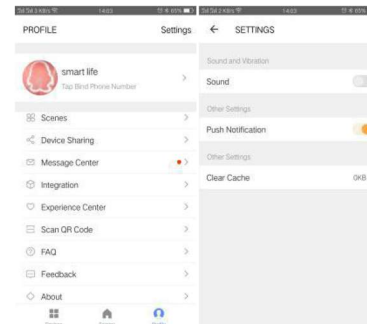

Push Notification: Settings---Push Notification.

LED State

Device Status	LED State
Smart Wi-Fi	LED will rapidly blink
AP mode	LED will slowly blink
be triggered	Red once
Reset	Long press the reset key for 4s , red led light rapidly blink 20s,then it will be ready for configuration



Make Your Home Smarter