



QUICK GUIDE




Smart Smoke Alarm R7049






English

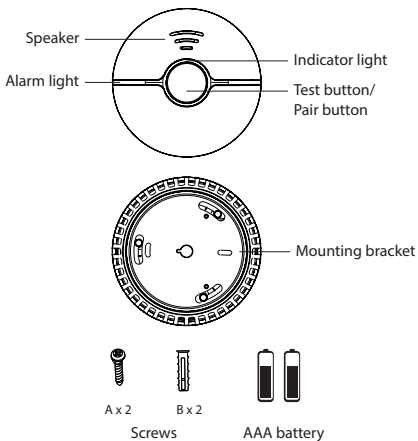

Introduction

The Tuya smoke alarm can alert with 85dB sound and red light when smoke detected, in the meantime, send real-time notification to smartphone. It can also works with other Tuya



English


products by creating scenario in Tuya smart app.

Requirement to use

1. Smart security or Tuya smart app
2. Tuya zigbee gateway (not included)

Set up the smart smoke alarm with Smart security or Tuya smart app

1. Download and install the app "Tuya smart" from Apple App Store or Google Play Store on your mobile device.
2. Launch the app "Tuya smart".
3. Create a new account or log in to your existing account.
4. Tap "+" to add the device.
5. Select the applicable product type from the list of products.
6. Select a Zigbee Gateway.
7. Ensure the indicator light is quick flashing. If the indicator light isn't flashing: press and hold the pair button for 5 seconds until the indicator light starts to quick flashing.
8. Press confirm button in the Tuya smart app.
9. The app will now search for the device and




English

- register is to your account.
10. Enter the device name.

Installation

1. Put battery into smoke alarm and pair it to Tuya smart app.
2. Make sure the smoke alarm is in the range of Zigbee gateway's signal. Effective range testing: self-checking the smoke alarm in the app to test the sound and light alarm, if it works, then the smoke alarm communicate effectively with the Zigbee gateway
3. Remove the mounting bracket from the body of doorbell by pulling it down.
4. Mark the position of the mounting holes on the wall using the mounting bracket as a template. Drill out the mounting holes taking care to avoid any joists, electrical cables or water/gas pipes that may be hidden beneath the surface.
5. Once the holes have been drilled out insert the rawl plugs into the holes and fix the wall plate to the wall using the correct mounting screws provided.
6. Placing the body of the smoke alarm on the




English

mounting bracket.

Tips

1. Alarm testing: short press the test button of smoke alarm, it will make a sound and light alarm. You can also self check the alarm function in the app.
2. Disable alert: short press the test button of smoke alarm or disable alert in the app.
3. In standby mode, the indicator light flashes one time every 20 seconds.
4. The horizontal distance from the detector to the wall and beam should not be less than 0.5 m.
5. There should be no obstructions within 0.5 m of the horizontal distance around the detector.
6. The horizontal distance from the detector to the nearest side of the air conditioning air outlet should not be less than 1.5 meters, and the horizontal distance of the air supply ceiling opening should not be less than 0.5 meters.
7. The detector is not suitable for usage in the environment of extremely cold and hot, high wind speeds and dust.
8. The smoke inlet and outlet shall be cleaned in



English

every 6 months, to prevent the detector from being detected by dust blockage.

Specification

Battery: DC1.5V AAA x 2 (included)

Battery life: 1.5 years

Trigger: photoelectric

Alarm sound: $\geq 85\text{dB}$

Monitoring range: 30m^2

Dimension: 128x128x45mm

Wireless connection: Zigbee 3.0

Wireless frequency: 2.400-2.483GHz

Working temperature: -10°C - 50°C

Working humidity: 0-95%RH, no condensation

