


## Smart DIY Switch Module




### Parameters:

Input: AC 85-250V/Type C 5V  
Max load: 10A/Gang  
WiFi: 2.4 GHz b/g/n+Bluetooth  
Radio Frequency: 433 Mhz

### Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.
- You have the correct WiFi PWD.
- You smart phone or tablet must have access to APP store, Google play.
- Your router is MAC-open.

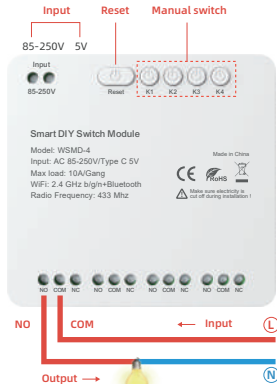

### User Guide

- 1 You can download the App by searching "AVATTO" or "Smart Life" APP in mobile app stores or scanning the following QR code



- 2 Register an "AVATTO" or "Smart Life" APP account.
- 3 If you have "AVATTO" or "Smart Life" APP account, just login.

### Add devices

- 1 Reset the device first:  
if the network indicator (red light) blinking fast, skip the reset step.  
① Power on  
② hold down the Reset button for 5 seconds, until network indicator (red light) blinking fast, make your device entered pairing mode.
- 2 Clicking + in the top right corner on tuya smart app, wait a few seconds, After the devices are found, Click "Add".



- 3 Select a 2.4GHz Wi-Fi network and enter your password.




- 4 Name your device.




- 5 When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.
- 6 Click the on/off buttons on the APP can control device, Manual control switch also can be display real-time on the APP.

### APP Function



Tip here to enter the full function operation interface.

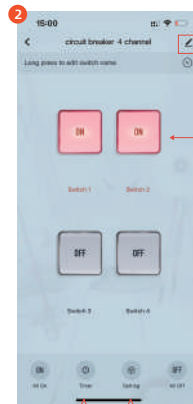

/Rename  
/Offline Notification  
/Share Device  
/Create Group  
/Remove Device

Long press the switch to change the name and icon

/Schedule  
/Countdown  
/Sunrise  
/Circulate  
/Random

/relay status  
/switch type setting  
/interlock setting  
/RF remote control setup

## Remote control matches the code

Matching:

- 1 Figure 2 interface, click setting> RF remote control setup>Add.
- 2 When the prompt interface pops up, then long press the remote control button you want to match.
- 3 loosen the remote control buttons, matching success.
- 4 Added successfully, assign the remote control buttons to the switches that need to be controlled

\*match other buttons, repeat steps 1 to 4.

