

Scene Switch

1 GANG

2 GANG

3 GANG

4 GANG

Contents

English 01~16

Chinese 17~31

Features



ZigBee



*BT 5.0 SIG Mesh



Remote control



Scene Setting




Battery Power




Mechanical Push
On/Off Button

Product Introduction

- This scene switch is powered by battery, which is developed under ZigBee communication. After connecting with ZigBee gateway and adding on Smart life App, it allows you to quickly "set the scene" for a particular room or living scene, like Reading, Movie, and so on.
 - Scene switch is a time and energy-saving alternative to the traditional hard-wired switch, the push-Button It can be stick on the wall or put it on everywhere you like.
- *BT 5.0 mesh communication is available, it requires Bluetooth gateway.

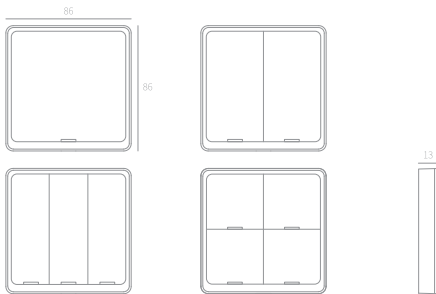

Scene Switch with Your Smart Home

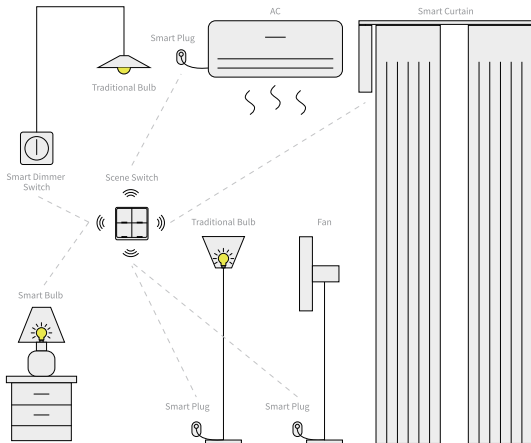


Specification


Input Power:	CR 2430 button battery
Communication:	ZigBee 802.15.4/2.4GHz /BT Mesh
Dimension:	86*86*13mm
Standby current:	10uA
Working Temperature:	-10°C~45°C
Working Humidity:	<90%RH
Button lifecycle:	500K

Installation

Open the cover then put the button battery in the battery slot.
Press the button on the switch, the indicator will turn on, it means that the switch works correctly.




1. Push the panel to the left



2. Open the cover then put the button battery in the battery slot.

Fix it as Where as You Want



Bedroom



Living Room




Kitchen



Bathroom

Connection and Operation

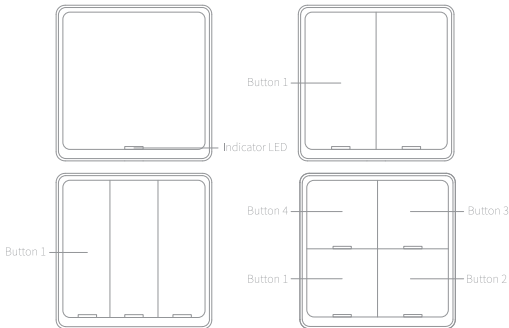

Indicator LED

Press the button, the indicator will turn on.

The indicator flash quickly, it means that the switch under process of network connecting.

Scene Switch Operate:

Each one button can be adapted upto three different scenarios through the APP

(Single Click) :Activate the 1st scene

(Double Click) :Activate the 2nd scene

Long Hold 5s:Activate the 2nd scene

Press and Hold button 1 for 10s get into pair mode, LEDs will quick flash

APP Operation


1.Search the App in the store or scan the QR code on the package / manual to download and install the App .



APP Operation

2. Register and login

If you download for the first time, please click the "register" button to register your account. If you have an account, click the "login" button.


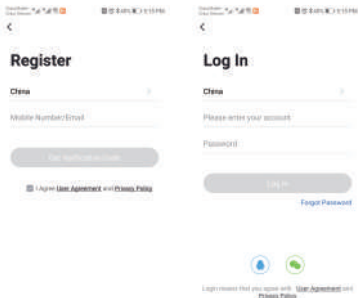


APP Operation

3. Add devices

note: ZigBee gateway needs to be added before adding devices

Connect the device to the power supply, press and hold the first button to put the device into the network configuration mode, and ensure that the mobile phone is connected to the network. Open the app, on the "smart gateway" page, click "add subdevice", and click "LED already blink".



APP Operation




Wait for device networking to succeed,Click "DONE" to add the device successfully.

*NOTE: If you fail to add the device, please move the gateway closer to the product and reconnect the network after powering on.




APP Operation

After connecting the network successfully, you will see the Intelligent Gateway page, choose the WIRELESS SWITCH 2 to enter the controlling page, then choose "Add intelligence" enter to the setting mode.




APP Operation

Choose "Add condition" to choose the the controlling condition, such as "Single click", the choose "Add task" choose the controlling action.

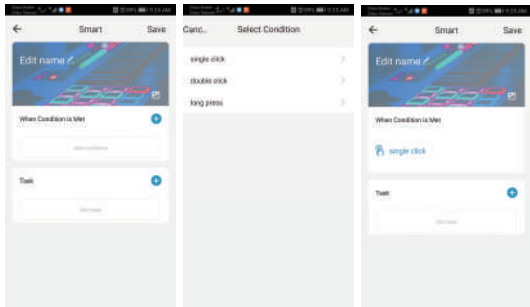

APP Operation

Such as choose the On/Off status of the switch.

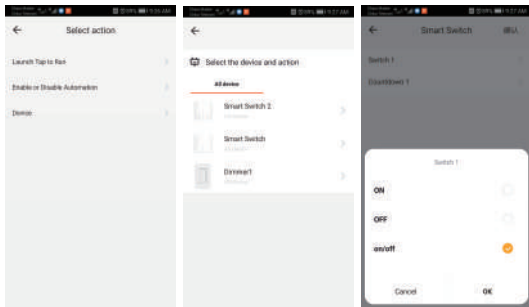

APP Operation

Save your collocation, then you could use the scene switch to control the light.

