



Wi-Fi Emergency Call Button

Operation Instructions

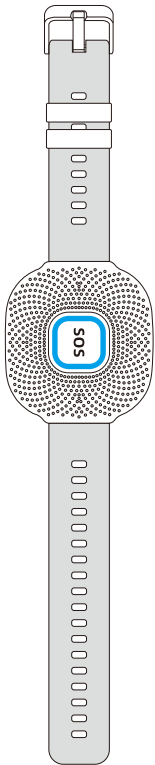

Appearance Introduction

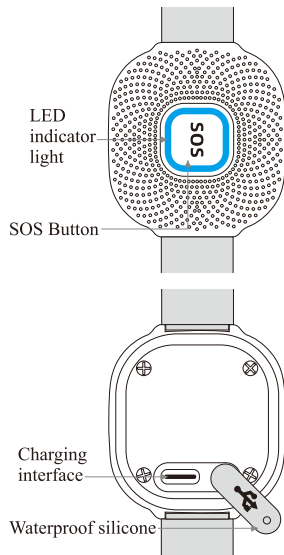


Download APP



Tuya Smart Smart Life

- Scan the QR code to download the app.
- Search for "Tuya Smart (or Smart Life)" in the app market to download the app.

Pairing Network Precautions

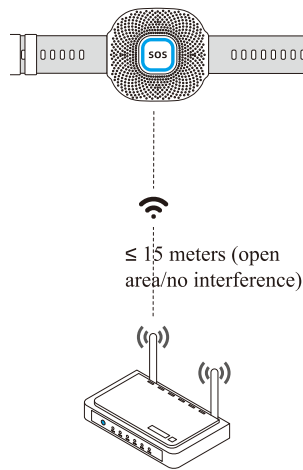


Wi-Fi: IEEE 802.11 b/g/n 2.4GHz


- Obstacles such as walls can affect the distance of Wi-Fi signals.
- If the product is too far from the Wi-Fi signal, it will not be able to connect to the mobile app.

Add Device to APP


- 1 Connect your phone to Wi-Fi (2.4GHz) and turn on Bluetooth.

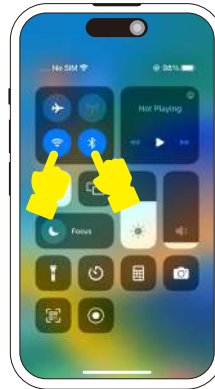

- 2 Open the app. Click on the "+" in the upper right corner. Click on "Add Device".

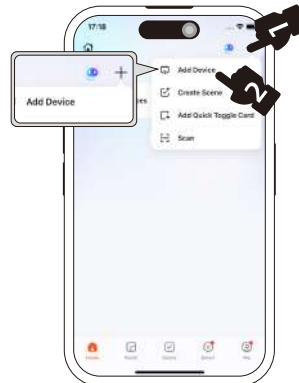


- 3 The product has entered the pairing network state.




Press and hold the **SOS** button for 12 seconds until the LED indicator light continues to flash, then release the button.


- 4 After automatically discovering the device, click on the device.

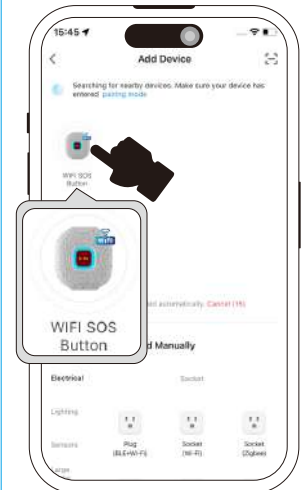

- 5 Enter the Wi-Fi name and password, and click "Next".

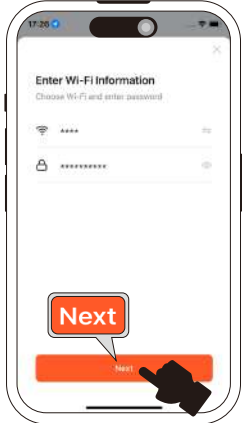


- 6 Connection successful, click "Done".

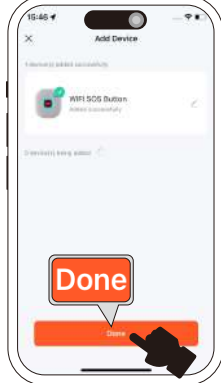

APP Shared Device

- 1 Click on the top right corner.

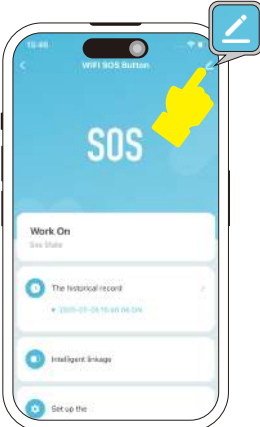


- 2 Click on "Share Device".




Usage

- 1 In case of emergency, press the SOS button. (Must be within Wi-Fi coverage)



- 2 The APP received an alarm push.

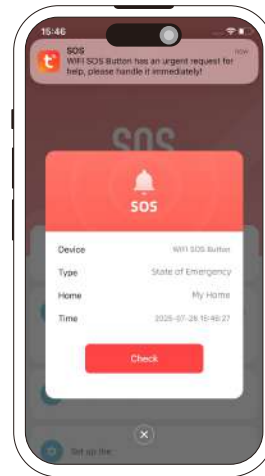

Q&A

Q: Unable to connect to the app?

- A:
- The distance between the product and the router exceeds the communication range of the product. Please approach the router 1-3 meters for network distribution.
 - The Wi-Fi frequency does not support 5GHz, only 2.4GHz.
 - Press and hold for 12 seconds to re-enter pairing network mode.


Q: Why hasn't the app received any alarm notifications?

- A:
- Please go to the system settings and grant access to push applications.
 - Please ensure that the product is within the coverage range of Wi-Fi signal.

USB Charging

- 1 Insert USB for charging.

USB-DC5V/2A adapter



Charging time: ≤ 1 hour



During charging, the LED indicator light is slightly on. When fully charged, the LED indicator light goes out.

Specification Parameters

- Input voltage: 3.7V
- Static current: 20 μA
- Alarm current: 50mA
- Wi-Fi: IEEE 802.11 b/g/n 2.4GHz
- Working temperature: -10 °C~50 °C
- Built in battery: 250mAh (polymer battery)
- Charging time: ≤ 1 hour