





SIREN ALARM INSTRUCTION



Product configuration



Reset:

- (1) Press the reset button for 6 seconds till the indicator flash rapidly.Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Specifications

Battery:CR123A-3V X 2
USB Power adapter :5V--1A/2A
Standby current:10uA
Working current:65mA
Max current:100mA
Wireless type:2.4GHz
Wireless standard:IEEE 802.11b/g/n
Wireless range:45M
Operating Temperature:0℃ ~ 40℃ (32°F ~ 104°F)
Operating Humidity: 20% ~ 85%
Storage Temperature:0℃ ~ 60℃ (32°F ~ 140°F)
Storage Humidity:0% ~ 90%
Size:50mm x 48mm x 48mm

Note:it is powered by USB power adapter normally,batteries are just for back up.(batteries can last two days)




Download App

1. Android phone:Download "Smart life" from Google play store
2. IOS device:Download "Smart life" from APP store.




Register and login

1. Run "Smart life"from your smartphone.
2. Register and login

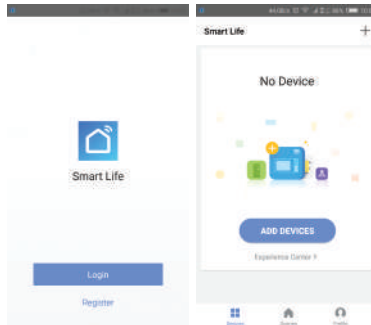

Add Device


Select the item that you want to add, add the device via Smart Wifi or AP mode



Network Configuration


1. Smart WiFi Mode:

Pressing the resetting button for 6s, the LED will rapidly blink.that is Smart Wifi mode.




2. AP mode:

Pressing the resetting button for 6s after the LED blink slowly,the device is in AP model to configurate the network.

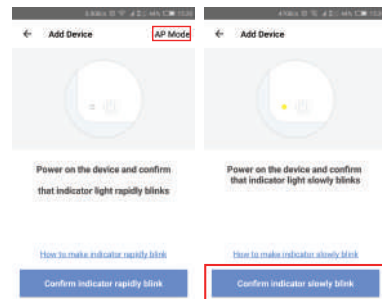


Main function

Setting Alarm duration and alarm sound type

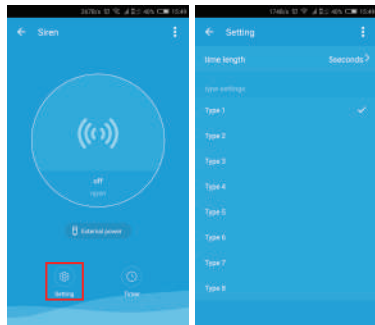


Scheduled alarm (Scheduled alarm will have around 30s deviation)

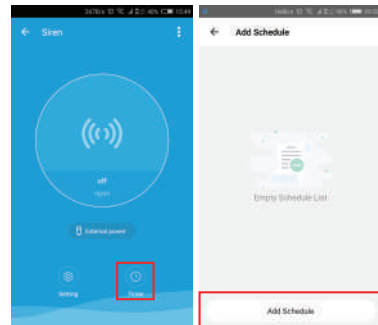


Customize Scenes

Scenes setting(Sound type setting and duration setting must be set)

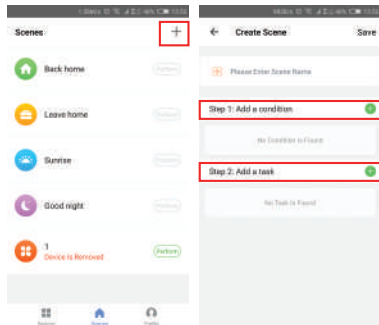


Device Sharing

Device Sharing : Allow others to control the device by sharing device(note:you can delete the sharing in profile setting)

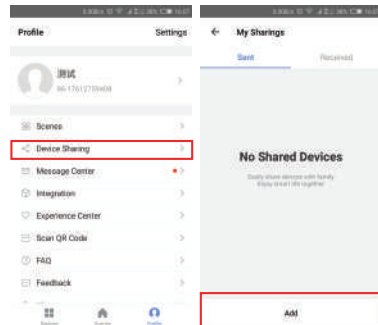


Push Notification

Enable to turn off .

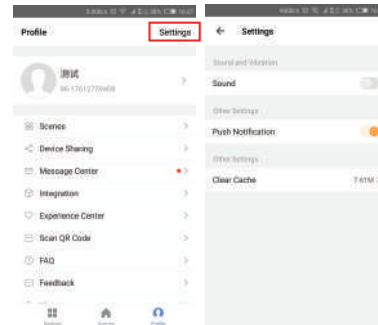

Remove device

The device will restore default settings.

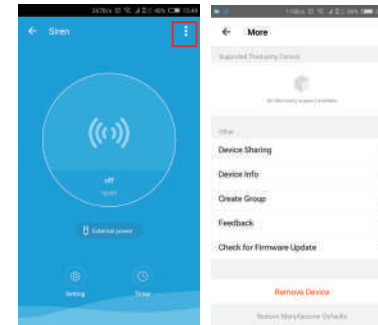

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes quickly
AP mode	Indicator flashes slowly
Triggered	The indicator will rapidly blink, and OFF after scheduled time
Reset	Indicator lights up for 4s and after 2 seconds lights off, device goes into configuration mode



Make Your Home Smarter