

Smart WiFi Door Lock User Manual



Tuya Smart



Smart Life

Product Information

The product is called TuyaSmart and it is a smart lock. It comes with a mobile app called TuyaSmartAPP that allows users to manage the functions of the smart lock. The product supports various features such as fingerprint, password, and IC card access. It also has the ability to add and delete users, set security passwords for remote unlocking, create families, and customize lock settings.

Product Usage Instructions

Access Door Lock Function Management (No Networking Mode)

In the normal state:

- Press “*” is return/exit/delete key; Press “#” is confirmation/input/repeat voice broadcast.

To add an administrator:

- Add administrator you can use the fingerprint, password, or IC card
- After adding the administrator, access the door lock function management
- Press “*” to return to the next level or continue adding administrators

Add User, Delete User

In the initialization state:

- To wake up the screen, press “*#”
After adding an administrator, validate the administrator by pressing 2

To add user information:

- Press 1
- Enter the desired user information (fingerprint, password, or card)
- After successful operation, press 1 to return or continue adding ordinary users

To delete user information:

- Press 2
- Enter the fingerprint, password, card, or number of the user you want to delete
- After successful operation, press “*” to return or continue deleting users

Download App and Basic Setting

To download the TuyaSmart app:

- Search for “TuyaSmart” on the Apple App Store or Google Play
- Download and install the app on your iOS or Android device

To perform basic settings:

- **Registration and Login:** You can register an account using your mobile phone or email. Input the required information and login to your account.

Lock Settings

To access lock settings:

- After adding an administrator, validate the administrator by pressing 3.

To set the function:

- Press 1
- Follow the on-screen instructions to select the desired options

To adjust the volume:

- Press 2
- Select either increasing or decreasing the volume

To set the tone:

- Press 3
- Select either Chinese phonetics or English pronunciation

To set the timer:

- Press 4-1
- Enter the desired time in the format 20_year_month_day_time_minute
Note: Use the appropriate number keys to complete the set according to your actual use needs.


Add a Lock on App

1. Press the “*#” button on the lock to enter the admin interface.
2. Press 1 into APP Setting, and then press 2 Del Module, press 1 Add Module into APP add module.
3. Open Tuya APP click Add Device-Camera&Lock-Lock (Wi-Fi), then wait for the successful network configuration, about 2 minutes

Access Door Lock Function Management


Access Door Lock Function Management (no Networking Mode)

In the normal state “*” return/exit/delete key “#” confirmation/input/repeat voice broadcast

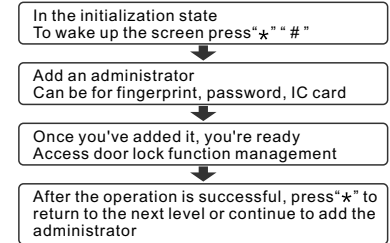


Add User, Delete User

“+” return/exit/delete key “#” confirmation/input/repeat voice broadcast.

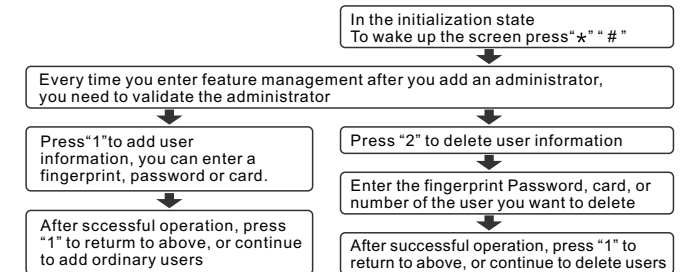


Lock Settings

“+” return/exit/delete key “#” confirmation/input/repeat voice broadcast.

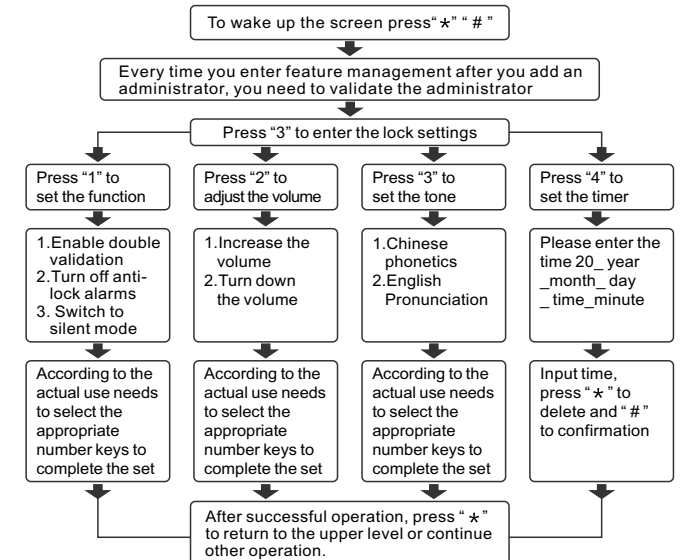


Add An Administrator

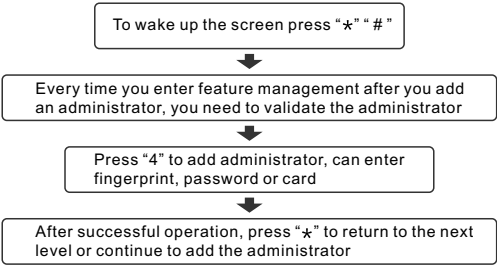

Access Door Lock Function Management
(with Networking Mode) Optional

"★" return/exit/delete key "#" confirmation/input/repeat voice broadcast

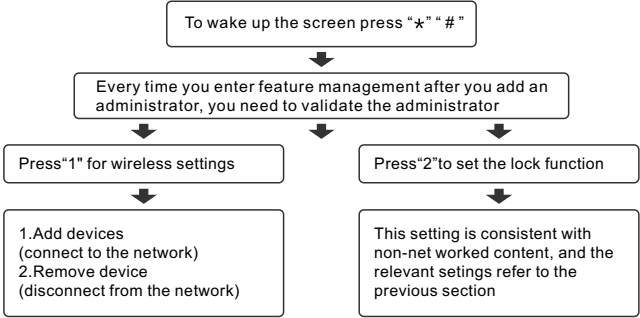

Restore Factory Settings

Use the needle long presses the keyhole key for 5 seconds, all information and records will be cleared.