



WiFi/Bluetooth/Zigbee

Technical parameters

Name	Waterproof controller
Model	38051/38052/38053/38054/38055
Input Voltage	12-24V
Outout current	6A/CH MAX
temperature	-20-45°C
Operation mode	WIFI/2.4G
Waterproofing	IP68
Connection mode	Gongyang

Function description

- The product is a smart product with an IP68 waterproof controller
- coupled with a full-touch touch ring remote, and its controller
- supports the WIFI protocol. The connection adopts waterproof
- interface, the shell laser marking is not easy to drop, the touch is
- sensitive and the feel is excellent, can be combined with the
- remote control to achieve the infinitesimal toning light, easy to
- operate the remote control, can be widely used in various places
- lighting.





PARAMETERS	SIZE/CM	G.W./KG
1PCS	24.7*10.5*3.8	0.27
50PCS	54*51.5*20	14.5

Technical parameters

Name	2.4G Waterproof controller
Model	30081/30082/30083/30084/30085
Input Voltage	12-24V
Outout current	10A MAX
temperature	-20-45°C
Operation mode	2.4G
Waterproofing	IP68
Connection mode	Gongyang

Function description

- 2.4G LED waterproof controller series is a smart LED product with
- IP68 waterproof performance, used to control a variety of led
- light source lamps, its controller can support remote control. The
- connection adopts waterproof interface, the shell laser marking
- is not easy to drop, the operation is flexible and the connection is
- convenient, etc., can be widely used in outdoor, decoration
- scene lighting and other places.

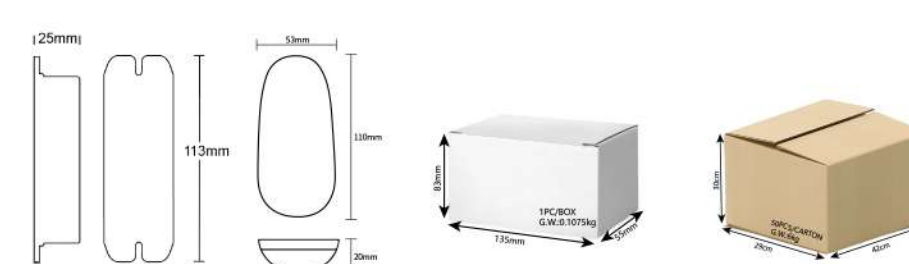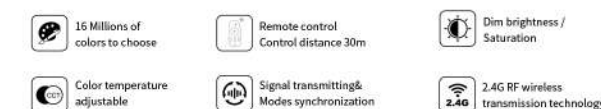

PARAMETERS	SIZE/CM	G.W./KG
1PCS	13.5*8.3*5.5	0.1075
50PCS	42*29*30	6