



PBL20EBL41
Instruction

English

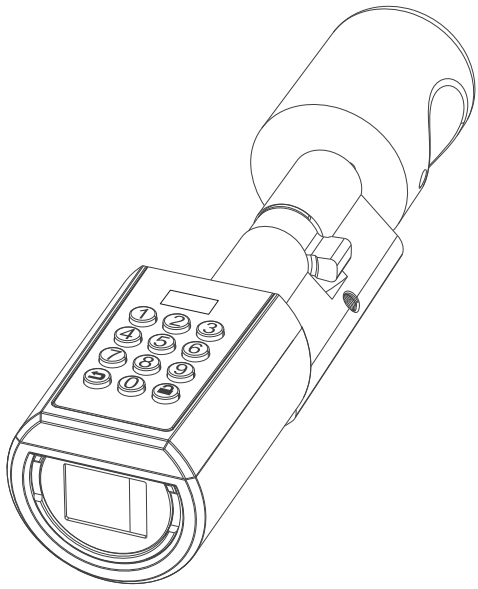


Catalogue

- Applicable size 01
- Product components 03
- 1.Language:Flow chart 04
- 2.Passcode:Flow chart
- 3.Other settings:Flow chart 05
- Accessories list (TOOL BOX) 06
- Install battery
- Adjust the length of the cylinder 07
- Installation pictures
- Uresetting diagram
- Unlock and lock 08
- FAQ
- Bluetooth activation and login instructions 09
- Select"Android/iOS"to download
- Log in to the app
- Bind the device 10
- Specifications 11
- Operating instruction

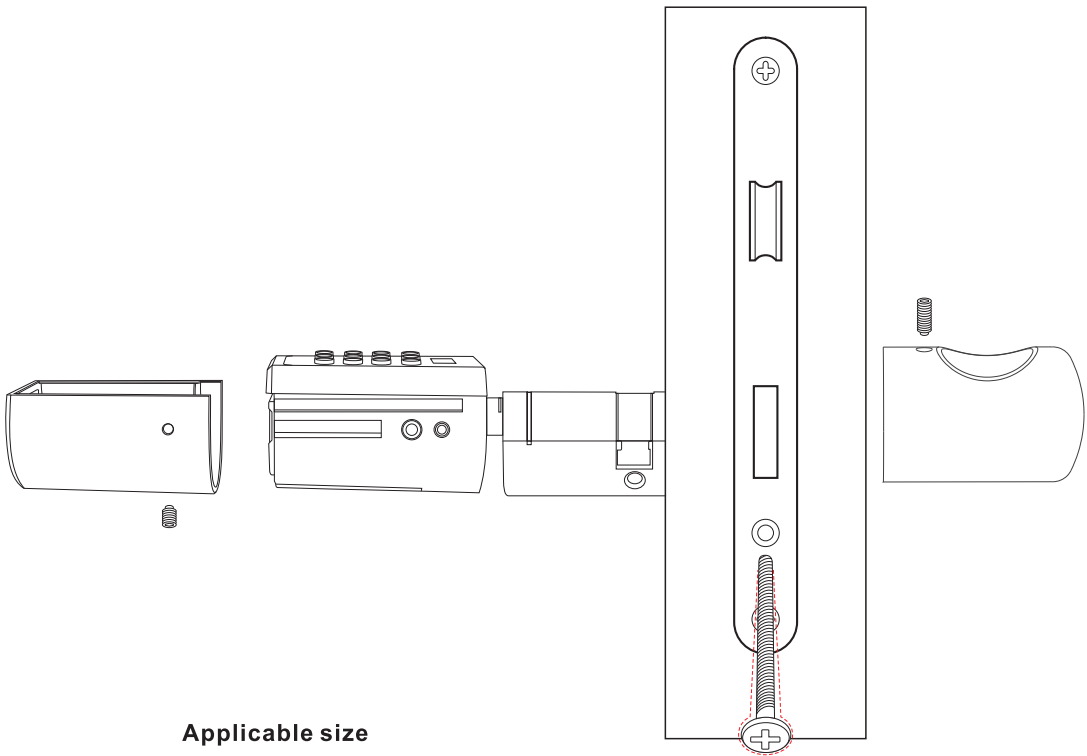






Applicable size

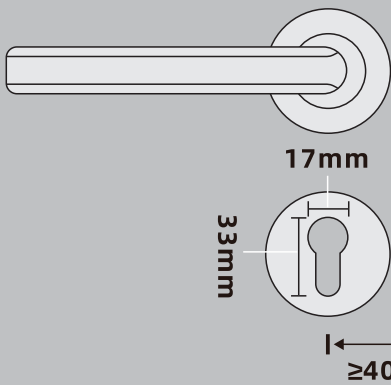


50-100mm

≥40mm


Product Components

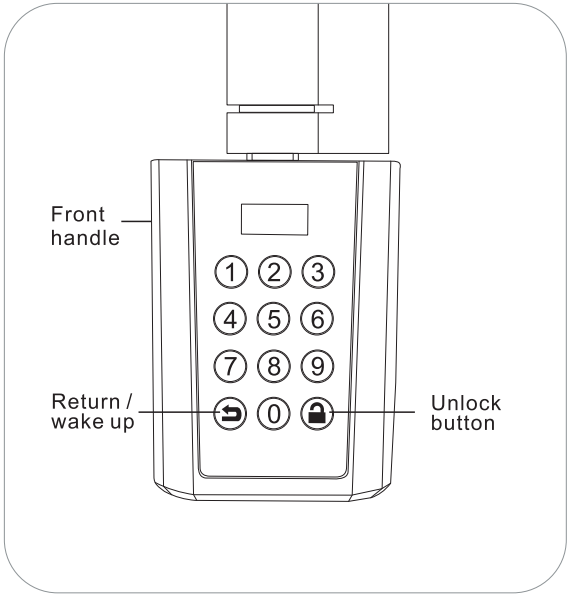


1.Language:Flow chart

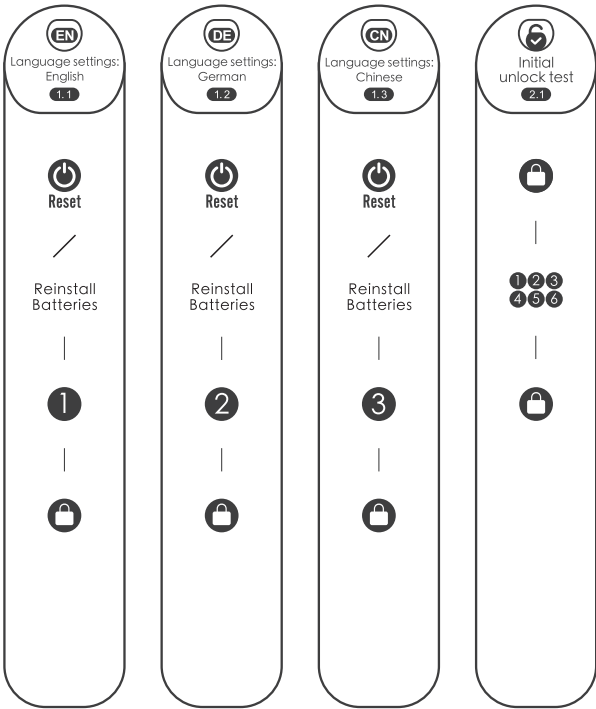



2.Passcode:Flow chart

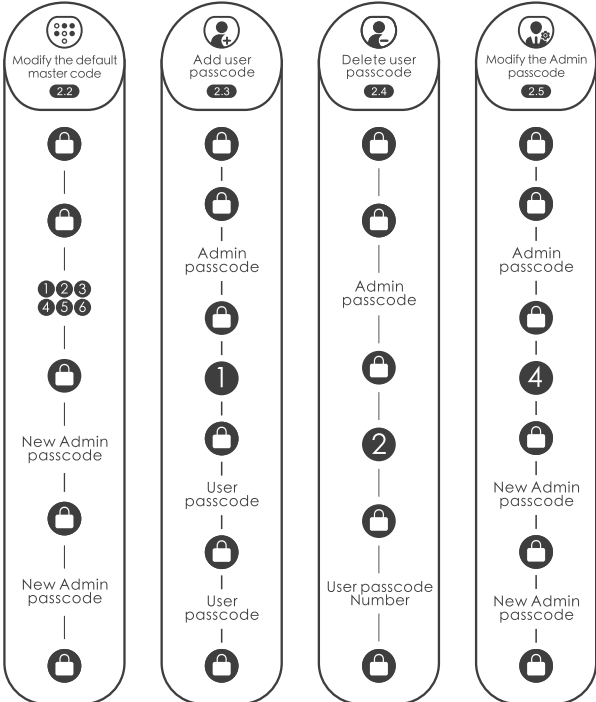

3.Other settings:Flow chart

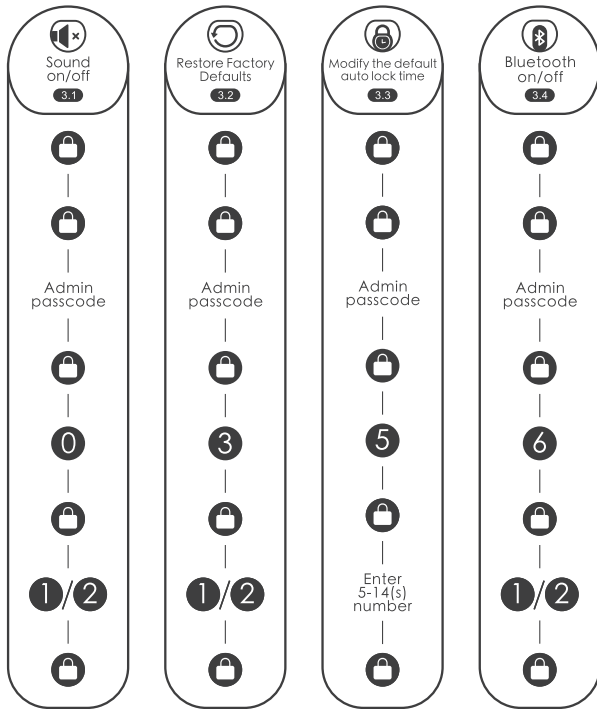


3.Other settings:Flow chart

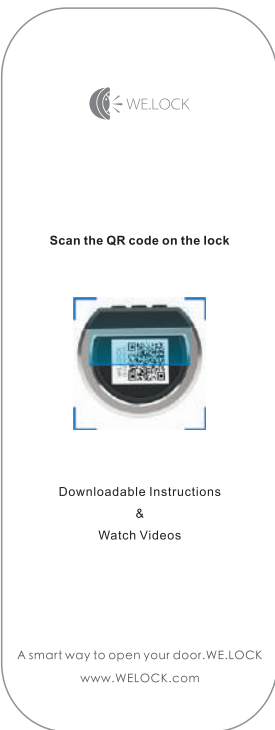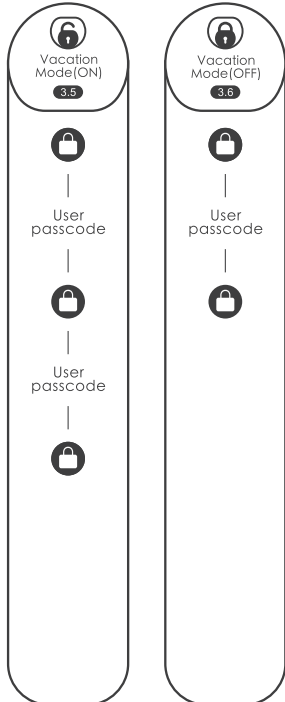


Accessories list (TOOL BOX)

If there is a lack of accessories, please contact customer service in time.

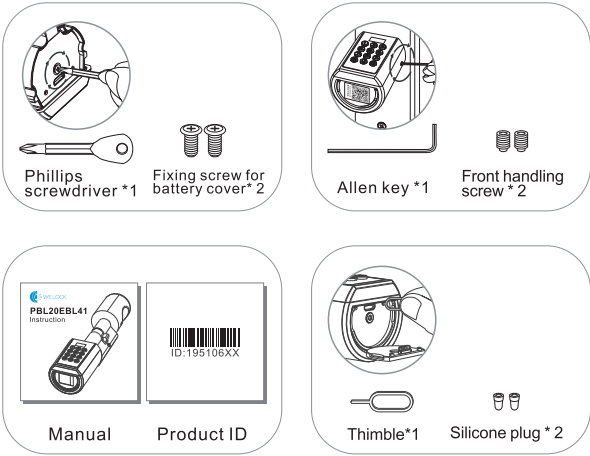


Install battery

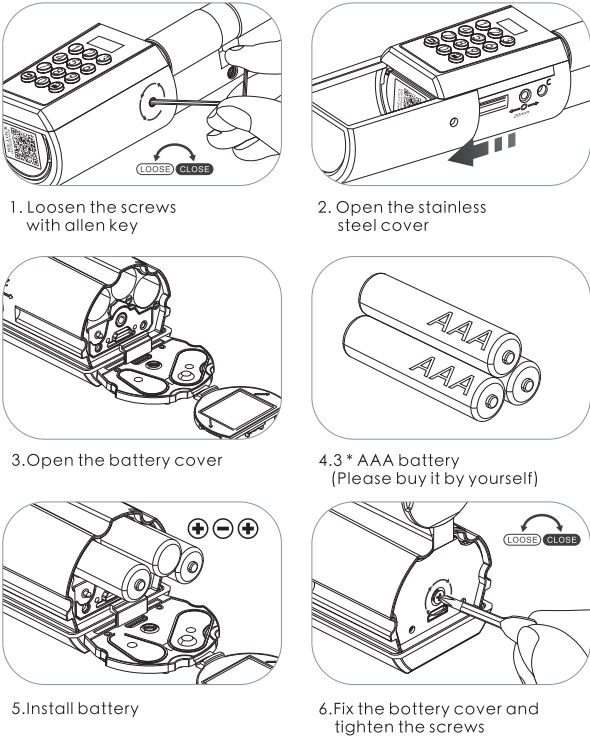


Adjust the length of the cylinder


Depending on the required cylinder length you can adjust the interior and exterior length by loosening the screw with the screwdriver and then pulling out the handle upon need. Tighten the screws after adjustment and plug the adjustment holes with silicone plug, which can play a certain waterproof effect.

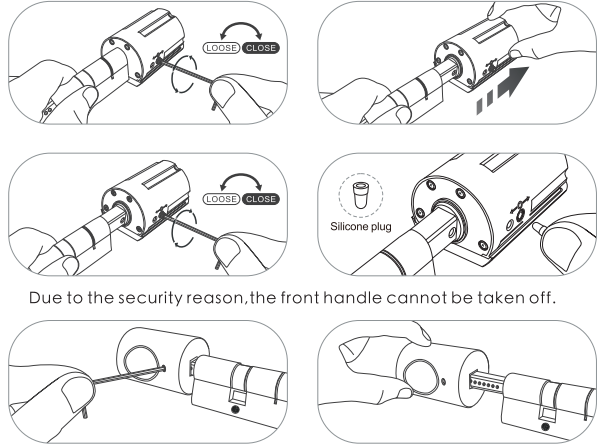

Installation pictures

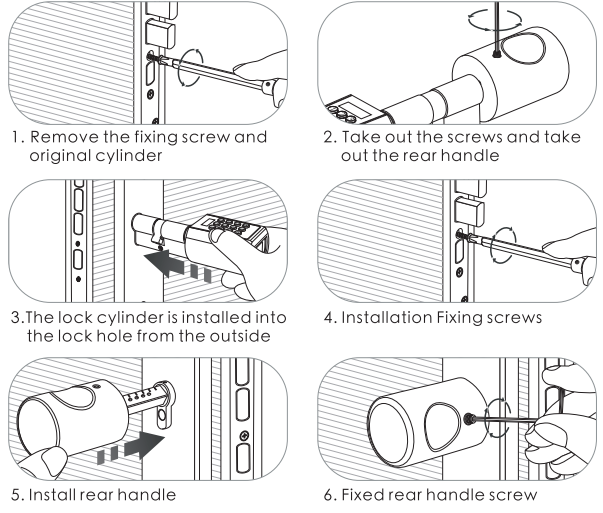


Resetting diagram

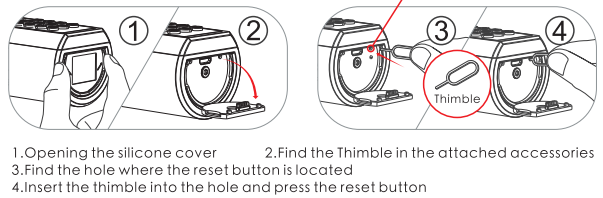

Unlock and lock

Unlock the door from outside

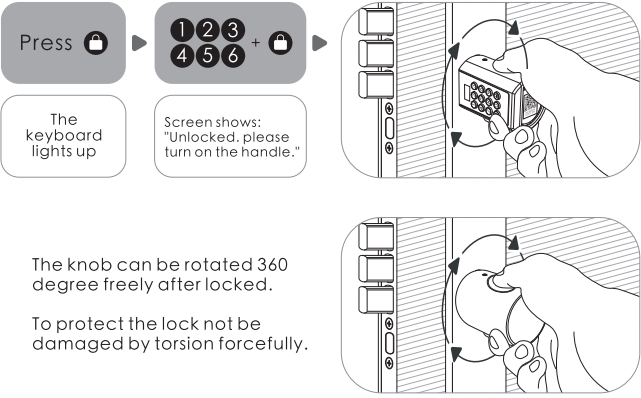

!

Low battery prompt:
After waking up, the screen displays:

After 3 "beep beep beep" beeps
The screen prompts: "Battery Low".


Battery Low

Battery Low

Please replace the battery promptly when the above message appears.

FAQ


- What should I do when I receive the lock?**
When you received the lock, please modify the default password "123456" to your own admin password first, so please keep it in your mind.
- Where can I find the lock ID?**
Please find the lock ID with 8 digits number on the middle of lock, or find it on packing box.
- When will the low battery alarm?**
The battery is below 20%.
- What is the USB backup key for?**
USB backup key is spare key, for emergency situations, like when the lock is broken or battery run out, then you can use power bank to charge the lock via USB cable, then use our app to unlock the lock.
- How can contact customer service?**
Please contact this email:
Service@WelockGlobal.com

Bluetooth activation and login instructions

Scan the QR code on the lock




Select "Android/iOS" to download

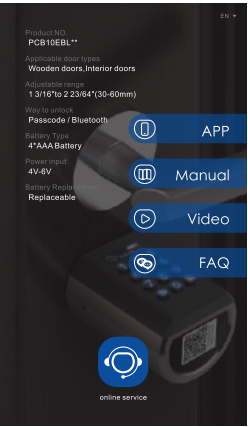


Log in to the app

- Select your country/region
- Enter the phone number/email to get the verification code
- Click "Send"
- Enter the verification code after receiving the message
- Click "Login"

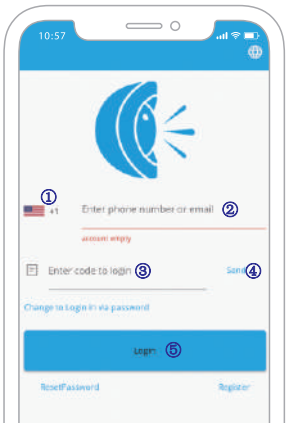

Bind the device

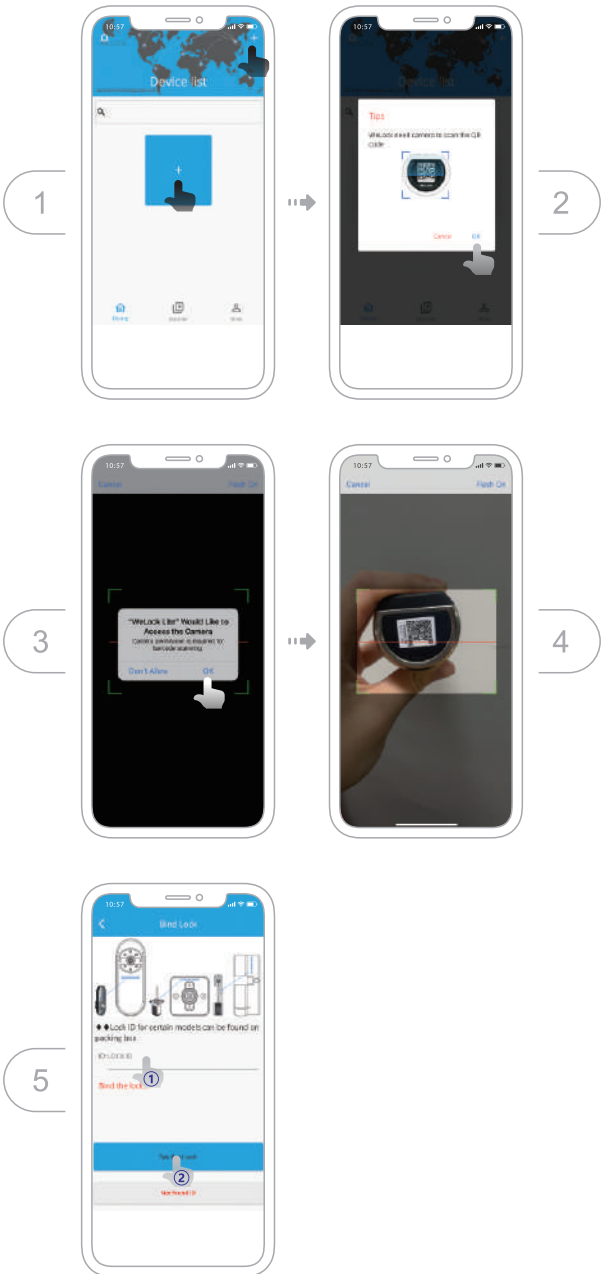

Specifications

Brand	WE.LOCK
Applicable door types	Wooden doors, interior doors
Adjustable range	50-100 mm
Operating Temperature	-25°C - 60°C
Pressing Cycle Times	100,000 Times
Material of handle	Zinc Alloy
Way to unlock	Passcode / IC card / Bluetooth
Battery Type	3*AAA Battery
Power input	3.6V-4.5V
Battery Replacement	Replaceable
Color	Silver
Battery Life	10-12 months

Operating instruction

- Enter the wrong passcode 5 times continuously. the system is locked for three minutes and cannot operate.
- Press  to wake up the keyboard+10 digits temporary passcodeEnter the wrong passcode 5 times continuously, the system is locked for three minutes and the cannot operate. Temporary passcode generation needs to be donein the App. The time on the screen should be the same as the time on the phone, otherwise the temporary passcode will be invalid.
- Press  to wake up the keyboard+ swipe the IC cards Swipe the unmatched card 5 times continuously, the system is locked for three minutes and the cannot operate. Any IC card can unlock the door in factory state.
- Bind the lock on APP
Bind the lock on APP via Bluetooth, click "unlock", and the phone time will be synchronized to the lock via Bluetooth.