


TOUCAKEY71

Instruction



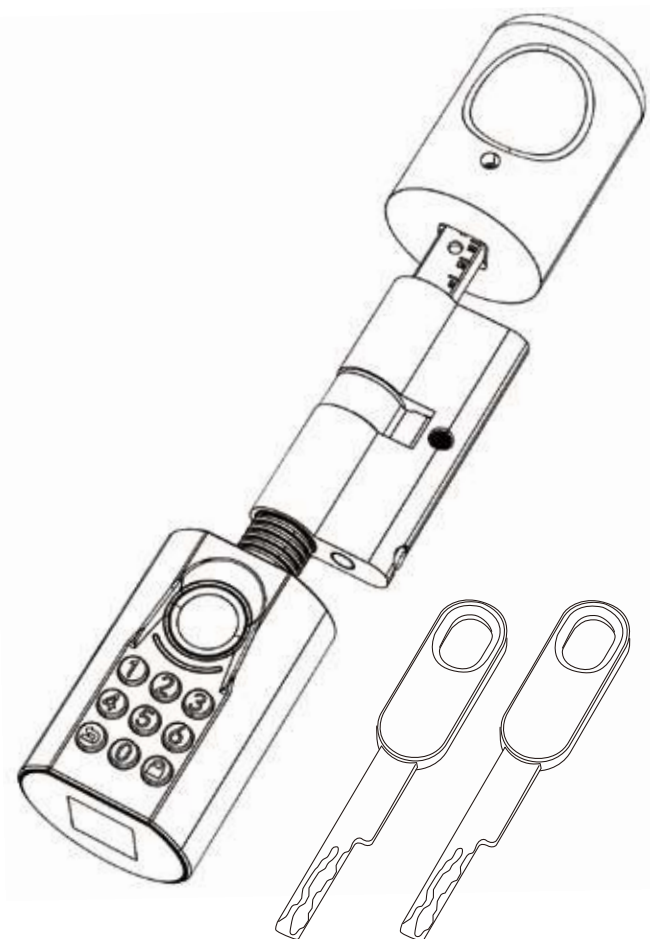

EN - Tips for Use:

1. When you received the lock, please modify the default password "123456" to your own admin password first.

Step: Press any button to wake up the lock first, click "🔑" + 123456 + "🔑" + set your own admin password + "🔑" + confirm your admin password again + "🔑". (Please noted: Need to use the admin password to enter the setup menu, so please keep it in your mind.)

2. Before receiving the correct unlock command, the handle of smart lock is able to rotate 360° which is normal



DE - Tipps für die Verwendung:

1. Wenn Sie das Schloss erhalten haben, ändern Sie bitte zunächst das Standardpasswort "123456" in Ihr eigenes Admin-Passwort.

Schritt: Drücken Sie eine beliebige Taste, um das Schloss zuerst aufzuwecken, klicken Sie auf "🔑" + 123456 + "🔑" + Ihr eigenes Admin-Passwort festlegen + "🔑" + Bestätigen Sie Ihr Admin-Passwort erneut + "🔑"

(Bitte beachten: Sie müssen das Admin-Passwort verwenden, um in das Einrichtungsmenü zu gelangen, also merken Sie es sich bitte).

2. Bevor der richtige Entriegelungsbefehl empfangen wird, kann der Griff des elektronisches türschloss um 360° gedreht werden, was normal ist.



IT - Consigli per l'uso:

1. Una volta ricevuto il lucchetto, modificare la password predefinita "123456" con la propria password di amministrazione.

Passo: Premere un pulsante qualsiasi per risvegliare la serratura, fare clic su "🔑" + 123456 + "🔑" + impostare la propria password di amministrazione + " " + confermare nuovamente la password di amministrazione + "🔑".

(Si prega di notare che: Per accedere al menu di configurazione è necessario utilizzare la password di amministrazione, quindi è bene tenerla a mente).

2. Prima di ricevere il comando di sblocco corretto, la maniglia dello serratura smart è in grado di ruotare di 360°, il che è normale.



FR - Conseils d'utilisation :

1. Lorsque vous recevez la serrure, veuillez d'abord modifier le mot de passe par défaut "123456" par votre propre mot de passe administrateur.

Marche à suivre : Appuyez sur n'importe quel bouton pour réveiller la serrure, cliquez sur "🔑" + 123456 + "🔑" + définissez votre propre mot de passe administrateur + "🔑" + confirmez à nouveau votre mot de passe administrateur + " ".

(A noter : Il est nécessaire d'utiliser le mot de passe administrateur pour entrer dans le menu de configuration, veuillez donc le garder à l'esprit).

2. Avant de recevoir la commande de déverrouillage correcte, la poignée de la serrure connectée peut tourner de 360°, ce qui est normal.



ES - Consejos de uso:

1. Cuando reciba el candado, modifique primero la contraseña predeterminada "123456" por su propia contraseña de administrador.


Paso: Pulse cualquier botón para despertar primero la cerradura, haz clic en " " + 123456 + "🔑" + establece tu propia contraseña de administrador + "🔑" + confirma de nuevo tu contraseña de administrador + "🔑".

(Tenga en cuenta: Es necesario utilizar la contraseña de administrador para entrar en el menú de configuración, así que por favor téngalo en cuenta).


2. Antes de recibir la orden de desbloqueo correcta, la manilla de la cerradura inteligente puede girar 360°, lo cual es normal.



Catalogue

• Applicable size	01
• Product components	03
• Accessories list (TOOL BOX)	04
• Install battery	
• Adjust the length of the cylinder.....	05
• Installation pictures/video	
• Setting operation	06
• Unlock and lock	08
• Bluetooth activation and login instructions	09
• Select"Android/iOS"to download	
• Log in to the app	
• Bind the device	10
• Specifications	11
• FAQ	





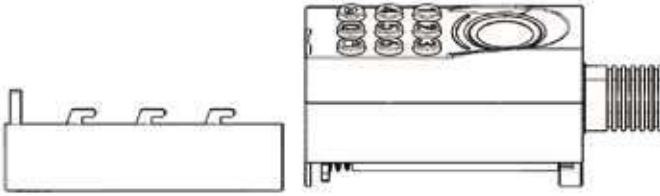


applicable size

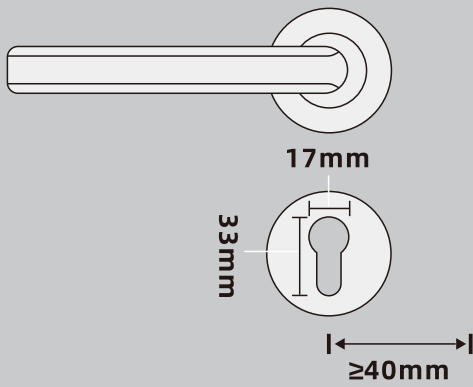

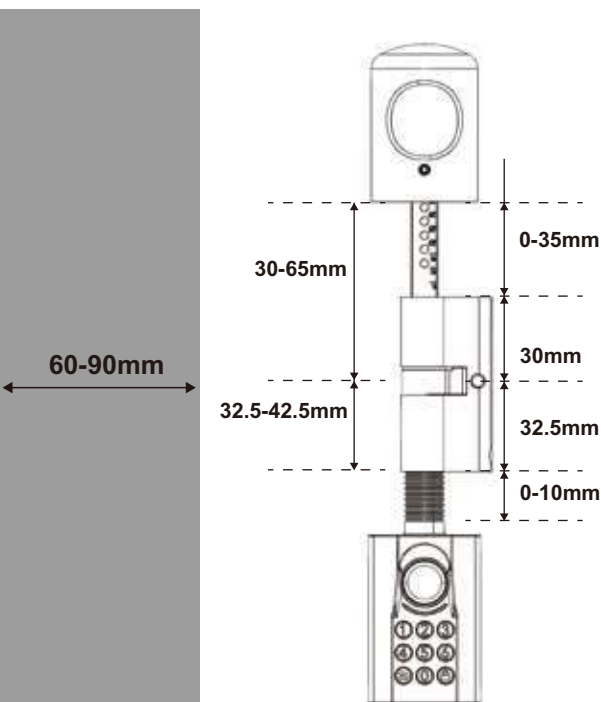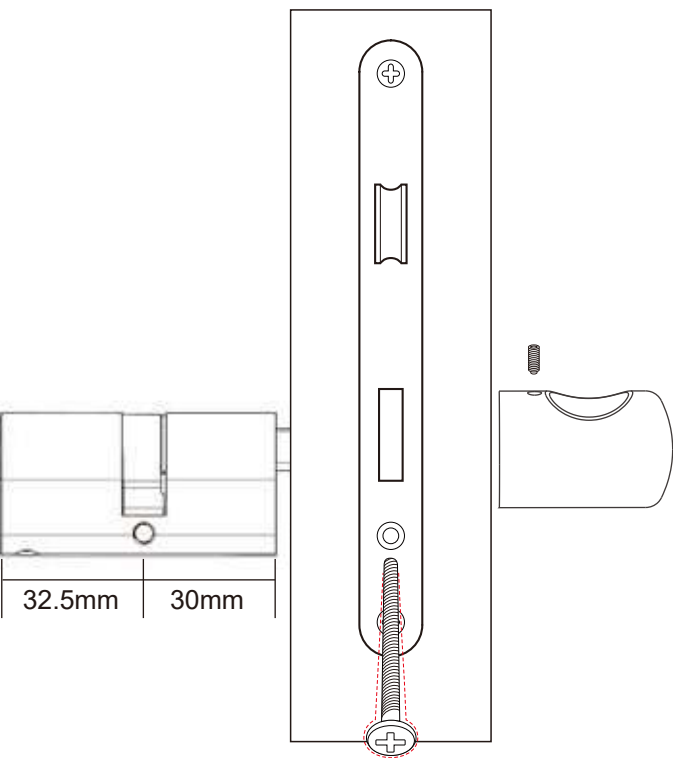

Product Components

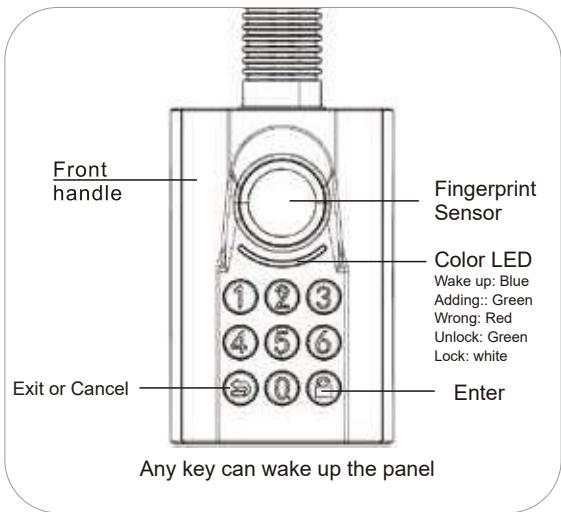

Accessories list (TOOL BOX)

If there is a lack of accessories, please contact customer service in time.



RIFD
Card*3



Key*2



Allen key *1



Manual



Product ID




Fix screw for
battery cover*2

Install battery




1.Open the silicone cover



2.Loosen the screw



3.Open the battery cover




4. 3 * AAA batteries
(Not included in package)




5.Install battery

Note: 1.Keep mind the battery polers
2. Do not mix old and new batteries




6.Fix the battery cover and
tighten the screws


Installation pictures

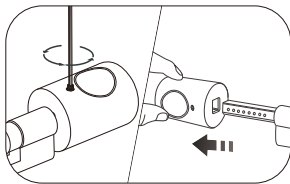


1. Take out the screws and take out the rear handle

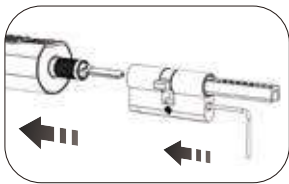


2. Insert the screwdriver,take out the front handle

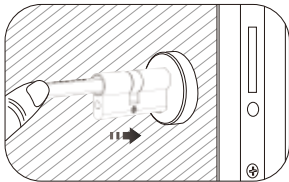


3. Rotating square axle to align the cam with the lock cylinder,install the lock cylinder into the door.

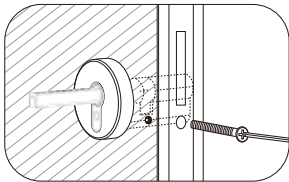


4. Align the screw holes of the insert with the screw holes of the lock body,install fixing screw.

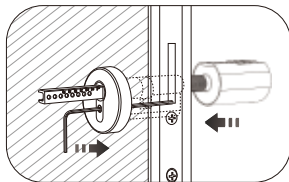


5. Rotating square axle to raise the cam, insert screwdriver into the bottom of lock cylinder.Insert the front handle and adjust it to the fit position.

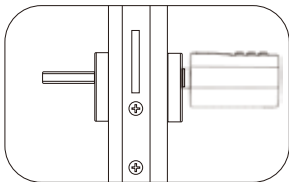

6. Pull out the screwdriver.

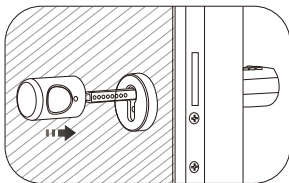


7. Install the rear handle to the fit position.Rear handle screw holes must be aligned with the square bar locating holes

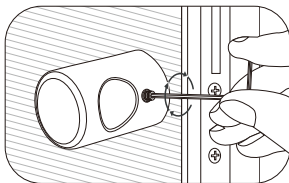


8. Fixed rear handle screw

Setting operation


1. Modify the admin passcode

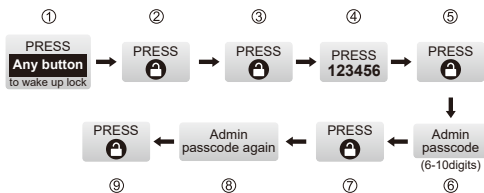

2. Add admin

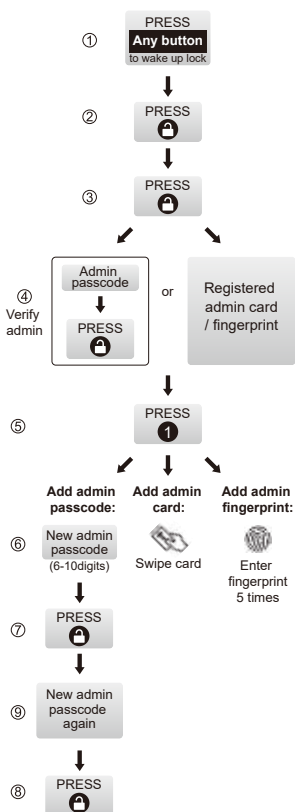

3. Add user

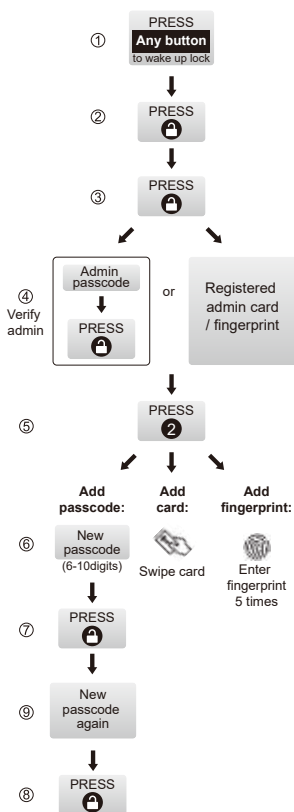

Successful fingerprint recognition: **Blue light**

Failure fingerprint recognition: **Red light**

Administrator of the lock can register **10pcs**, including fingerprint / password / smart card.

Example: 4pcs admin fingerprints,

4pcs admin passwords,

2pcs admin smart cards, totally 10pcs

Please note, there are quantity limits as follows:


Fingerprints capacity ≤ 100 pcs

Passwords capacity ≤ 200 pcs


Smart cards capacity ≤ 199 pcs

Total quantity capacity (fingerprints + passwords + smart cards) ≤ 200 pcs


4. Clean all user

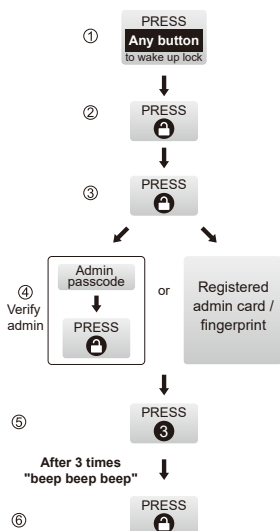


5. Restore factory defaults

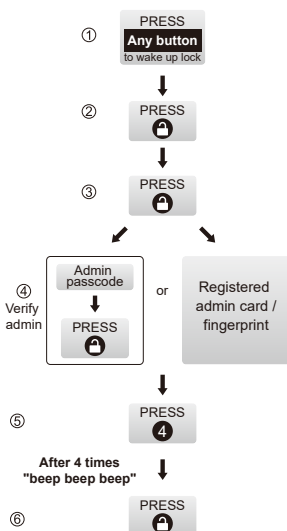


6. Vacation mode ON

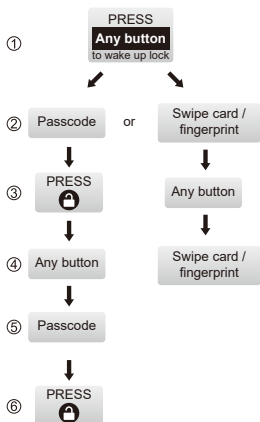

8. Silent mode ON / OFF




7. Vacation mode OFF





Unlock and lock

Unlock the door from outside


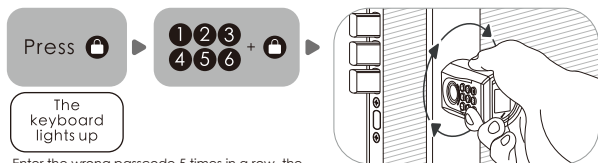


Enter the wrong passcode 5 times in a row, the smart lock will be locked for 90 seconds and cannot be operated.



Press any key to wake up



Press any key to wake up




Mechanical key unlock



The knob can be rotated 360° degree freely after locked.
To protect the lock not be damaged by torsion forcefully.

The knob can be rotated 360° degree freely after locked.

To protect the lock not be damaged by torsion forcefully.



Low battery prompt:


When the power is less than 3.7V, the red light will be on as warning 5 times with the buzzer rings.

Bluetooth activation and login instructions

Scan the QR code on the lock




Select "Android/iOS" to download

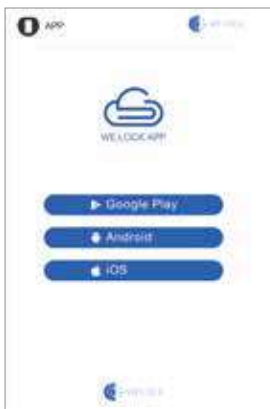


Log in to the app

- ① Select your country/region
- ② Enter the phone number/email to get the verification code
- ③ Click "Send"
- ④ Enter the verification code after receiving the message
- ⑤ Click "Login"

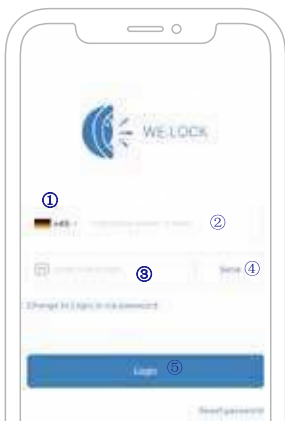

Bind the device

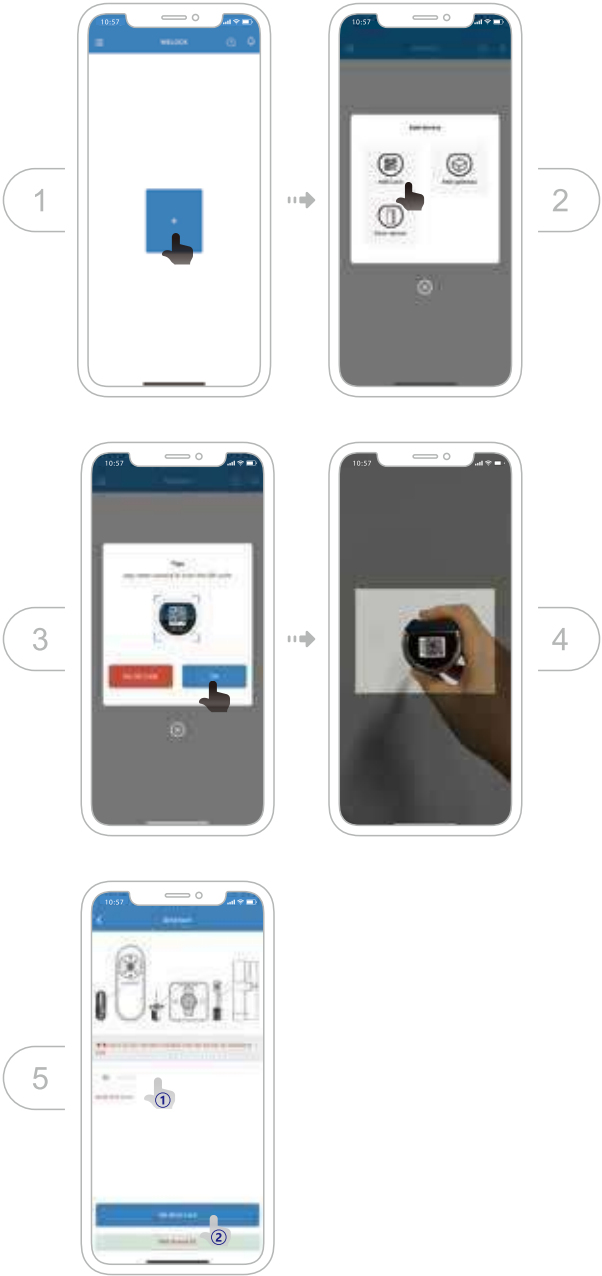

Specifications

Brand	WE.LOCK
Applicable door types	Wooden doors,interior doors,entrance doors etc
Adjustable range	60-90mm
Operating Temperature	-25 C - 60 C
Pressing Cycle Times	100.000 Times
Material of handle	Stainless steel+PC Plastic
Way to unlock	Fingerprint/Passcode/RFID card /APP/ Mechanical key
Battery Type	3*AAABattery
Power input	3.6V - 4.5V
Battery Replacement	Replacedble
Color	Silver
Battery Life	10-12Months

FAQ

How can I know the lock is out of power?

When the power is less than 3.7V, the red light will be on as warning 5 times with the buzzer rings.

Does the lock knob still works after I replaced the lock?

It still works. It only replace the cylinder . It won't effect the other function of the original lock.

Will it read slowly or fail to recognize the fingerprint afterlong time using?

It won't. The fingerprint sensor has a special protect film on it.

Is it complicated to set?

It's easy. You just need to use the thimble to press the set key to register the fingerprint. The screen will show you the function to choose and just press your fingerprint on it.

If we install all the houses' doors with We.Lock, can we use the phone APP to unlock all of it?

Yes, you can. One phone can in charge many different locks. Just remember to mark the name of each lock.

Online Service:

Email : service@welockglobal.com