




Wi-Fi Sound And Light Door And Window Alarm
Operation Instructions

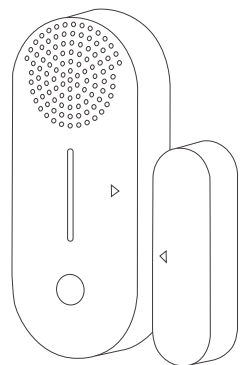

Product Introduction




Introduction to Function Keys




Installing

1 Install the battery.

1 Open the back cover of the transmitter.




2 Put in the battery.




LR03 AAA*2

3 End of battery installation.



4 Close the rear cover.



2 3M glue fixed installation method.

1 Tear off each side of release paper on two foam glue, and attach two foam glues respectively onto the fixing surfaces of the emitter and the magnetic stripe (as shown in Figure 1).

2 Tear off the release paper on the back of the remitter and the magnetic stripe and attach it at the installation position of a door or a window (as shown in Figure 2).




Figure 1





Figure 2


3 Installation Precautions.




Maintenance

Replacing the battery.

1 Remove the shell.



2 Use a screwdriver to remove the battery from the side.



Download APP




Tuya Smart



Smart Life

➢ Scan the QR code to download the APP.
➢ Please go to the application market to search for "Tuya Smart (Smart Life)".

Pairing Network Precautions

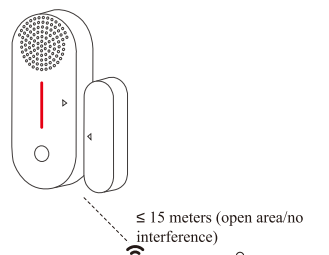


Wi-Fi: IEEE 802.11 b/g/n 2.4GHz


➢ Obstacles such as walls can affect the distance of Wi-Fi signals.
➢ If the product is too far from the Wi-Fi signal, it will not be able to connect to the mobile app.

Add Device to APP

1 Connect your phone to Wi-Fi (2.4GHz) and turn on Bluetooth.

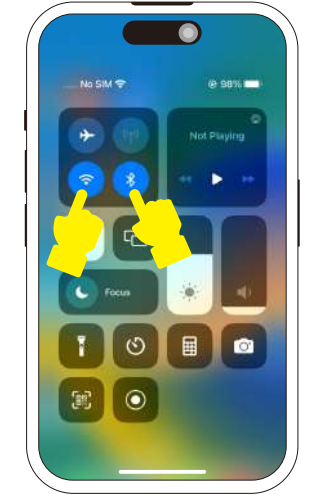


2 Open the app. Click on the "+" in the upper right corner. Click on "Add Device".

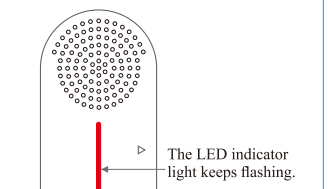


Press and hold the setting button for 6 seconds to release it, and the LED indicator light will continue to flash.


1 After automatically discovering the device, click on the device.

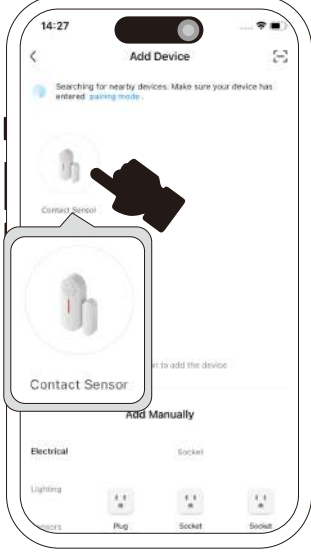


2 Enter the Wi-Fi name and password, and click "Next".

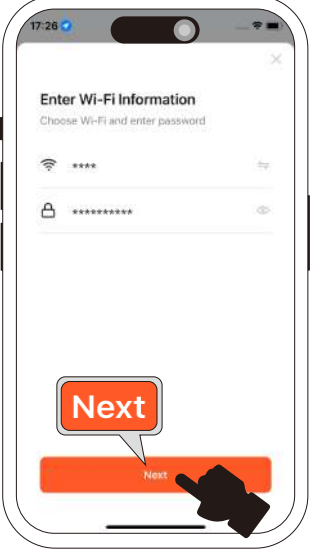

3 Connecting in progress.

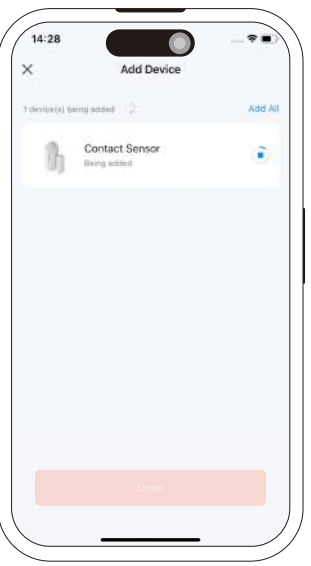


4 Connection successful, click "Done".

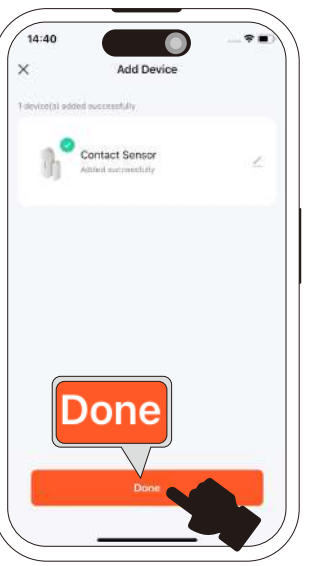


APP Operation

Arm/Disarm

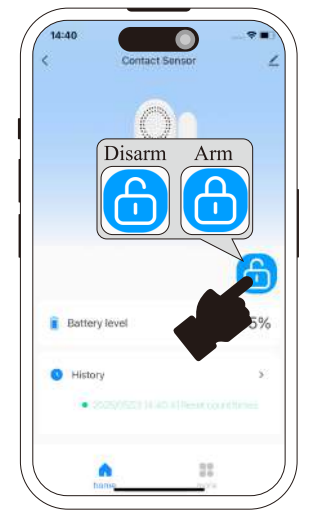


Set Product Features

1 Click on "more" in the bottom right corner.

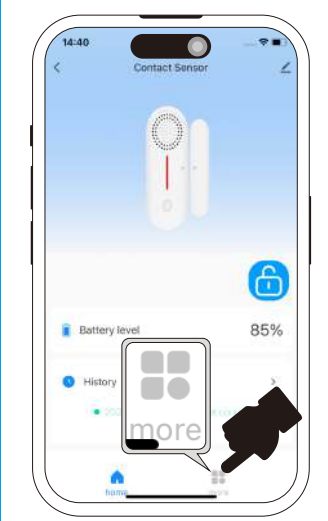


2 Set Alarm Time / Alarm Volume Value / Alarm Delay Time / Alarm Ringtone / timed arming/disarming.

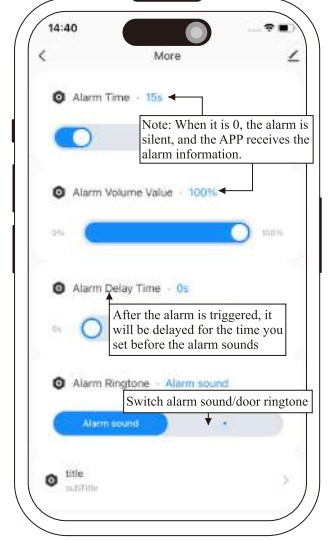

Change Device Name/Share Device

1 Click on the top right corner.

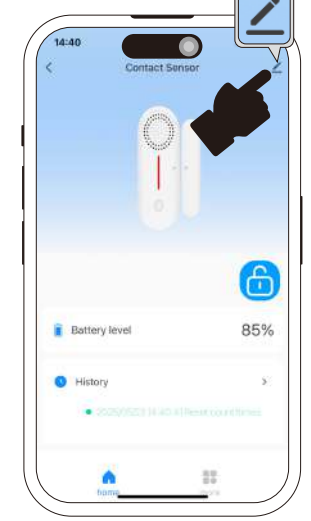

Specification Parameters

Working voltage: DC3V
Standby current: ≤180uA
Alarm current: ≤70mA
Alarm sound: ≤100dB (within 30cm)
Battery Specifications: LR03 AAA (2*1.5V)
Wi-Fi standard: IEEE 802.11 b/g/n 2.4G