

4CH-RF Smart Switch

Model: 7-32V 4CH RF Switch
Model: 7-32V 4CH RF Module
Model: 7-32V 4CH Module



Parameters:

Input voltage: DC5V/ 7V~32V
Max.Current: 2200W/10A/ Gang
Max.load: 3500W/16A / 4Gang
Wi-Fi Standard: Wi-Fi 2.4ghz b/g/n
Working temperature:-20°C~70°C
Working humidity:≤80%
Material:ABS
Size:134*79*28mm

Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

User Guide


- 1 Start with "EWelink" APP.



- 2 Register an EWlink account.
- 3 If you have EWelink acconunt. just login.
- 4 Power up.

Add device flow to mobile APP

- 1 After installation,power the device and hold down the pairing button(anyone) for 6 seconds until Network indicator blinks quickly(blinking twice and on).
- 2 Tap + on EWelink app.

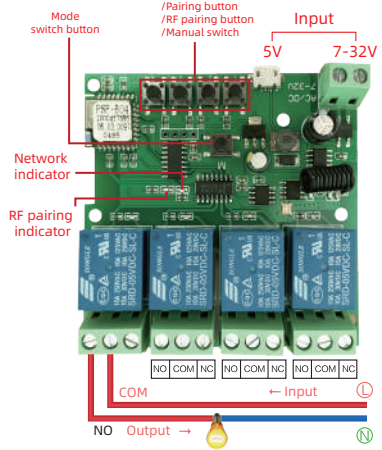


- 3 Select Quick Pairing Mode .
special cases You can try compatibility Model (AP)



- 4 Input your WiFi password.




- 5 Name your device.



- 6 When the WiFi LED is on,the device is online.
- 7 Click the on/off buttons on the APP can control device,Manual control switch also can be display real-time on the APP.

APP Function



- 2 9:38
4CH WiFi Switch
Rename/OTA/Share /Logs/Inching Settings /Delete device



For single/repeat timers.
For fast single countdown timer.

Remote control matches the code


- Matching:
- 1 hold RF pairing button for 3 seconds you want to match, until RF pairing indicator is on.
 - 2 then long press the remote control button you want to match.
 - 3 loosen the remote control buttons, matching success.

Clear code:
Long press the RF pairing button 15 seconds you want to clear until the RF pairing indicator is off.

* note: the matching/clear code method is only available with RF function switch/module reference.

TROUBLESHOOTING Solutions for the failure of product matching and offline:

Enter the homepage of App,click the icon in the lower right corner of the interface to enter. "Message" >hits" Guide". "Message" >hits" Ewelink support"



If none of the above is resolved,please open it with another phone.Personal hotspot,try to read.