


INSTRUCTION MANUAL

1CH,2CH,3CH,4CH


Wi-Fi Switch Module+RF433



TECHNICAL SPECIFICATIONS

Product type	Wi-Fi Switch Module
Voltage	AC100~240V 50/60Hz
Max. load	1CH: 10A/16A 2CH: 2x8A 3CH: 3x5A 4CH: 4x4A
Operation frequency	2.412GHz~2.484GHz
Operation temp.	-10℃ + 40℃
Protocol	WiFi IEEE 802.11b/g/n
Operation range	<100m
Dims (WxDxH)	39x39x20 mm
IP rating	IP20
Warranty	2years


with mounting clip



INSTALLATION

▲ Warnings:

1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of reach of children.
3. Keep the device away from water, damp or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted to abnormal operation of the device.
5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble, repair or modify the device.



FAQ

Q1: What should I do if I can't configure the switch module?

- a. Please check whether device is powered on.
- b. Make sure your mobile and switch module are under the same 2.4 GHz WIFI network.
- c. Whether it's in good internet conditions.
- d. Make sure the password entered in App is correct.
- e. Make sure the wiring is correct.

Q2: What device can be connected to this Wi-Fi switch module?

Most of your household electrical appliances can be, such as lamps, laundry machine, coffee maker, etc.

Q3: What happens if the WIFI goes off?

You can still control the device connected the switch module with your traditional switch and once WIFI is active again the device connected to module will connect automatically to your WIFI network.

Q4: What should I do if I change the WIFI network or change the password?

You have to re-connect our Wi-Fi switch module to the new Wi-Fi network accordingly as per the App User Manual.

Q5: How do I reset the device?


Power on/off device for 5 times until the indicator light flash.

RF433 pairing method:


1. Press the reset button quickly three times in succession. The indicator light will flash rapidly, entering the pairing mode of the remote control. At this point, by long-pressing the remote control button, you can pair the full-on and full-off functions.
2. Continue to press the reset button for 1 second. The light on L1 will switch on and off 3 times. The blue indicator light flashes once every 2 seconds. At this point, the remote control function of the first output channel can be set up independently.
3. Continuing to press the reset button for 1 second will allow you to pair each of the 2/3/4 channels separately.
4. When in pairing mode, the blue indicator light flashes rapidly continuously, indicating that it is in the full-on and full-off pairing mode. The blue indicator light flashing rapidly once within 2 seconds indicates that it is in the separate pairing mode for the first output line. The blue indicator light flashes rapidly twice within 2 seconds, indicating that the device is currently in the independent pairing mode for the second output line. The third route flashes three times. The fourth route will flash 4 times.
5. The remote control pairing mode will automatically exit 15 seconds after no operation.
6. You can also add the device to the APP, and then add or modify the functions of the remote control buttons in the settings. Up to 30 can be added.

1CH Wi-Fi Switch Module


Without Switch



Single Control




Double Switch




2CH Wi-Fi Switch Module


Without Switch



Single Control




Double Switch




3CH Wi-Fi Switch Module


Without Switch





Single Control



Double Switch



4CH Wi-Fi Switch Module

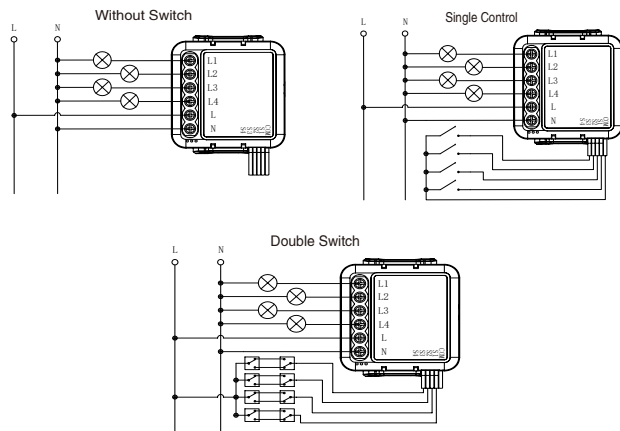

After the wiring of switch module is done, press the reset key for about 10 seconds or turn on/off the traditional switch for 5 times until the indicator light inside the module is flashing quickly for pairing.


APP USER MANUAL



IOS APP / Android APP


1

Scan the QR code to download Smart Life App, or you can also search keyword "Smart Life" at App Store or Googleplay to download App.



2

Login or register your account with your mobile number or e-mail address. Type in the verification code sent to your mobile or mail box, then set your login password. Click "Create Family" to enter into the APP.



4


- Support multi-protocol matching : WIFI/Bluetooth.
- Turn on Bluetooth, Click "+", follow the on-screen instruction for pairing.



5

The connecting will take about 10-120 seconds to complete depending on your network condition.

Finally, you can control the device via your mobile phone.



6

Connect to amazon alexa or Google Assistant for voice control, or share the devices with your families or friends.

Enjoy your smart life of home automation for lighting control by using our All-in-one mobile app wherever you are in the world or simply by voice control when you are sitting at home comfortably.